

**CARLISLE**

**TIRES THAT WORK AS HARD AS YOU DO**



**AGRICULTURE**

# AGRICULTURE

Carlisle agricultural tires are workhorses of American farms. Applications for farm fronts and rears, implement, transportation and more.

TREAD VIEW QUICK REFERENCE GUIDE





## FARM SPECIALIST IMPLEMENT

### Hay Rake

Carlisle Farm Specialist Implement tires are especially designed for heavy duty conditions resulting in longer life. The improved self-cleaning is achieved by specifically designed breakers in the tread pattern. Additionally, we designed inner liners and compound for high plunger resistance.



Item Number	Size	Star/PR	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
6A03361	155/70-6	6	70 A6	360.7	157.2	335	30	3.3	2.54	CN	5999110800318
6A02351	165/60-8	6	64 A6	406.4	162.6	280	30	3	3.1	CN	5999110800356
6A02361	165/60-8	10	85 A6	406.4	162.6	515	30	5.1	3.27	CN	5999110800349
6A03371	215/60-8	6	82 A6	450.9	213.4	475	30	2.35	4.5	CN	5999110800417

## FARM SPECIALIST F-1

### Hay Rake Applications

Used for highway service implement applications, the Farm Specialist F-1 tire is specially designed for towed vehicle applications at intermittent highway speeds. DOT approved for highway use. Made in the USA.



Item Number	Size	Star/PLY	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (Kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
51H359	9.5L-15FI	LR D	115 J	768	10	1216	60	4.1	18.42	US	5999110825359
51H360	9.5L-15FI	LR E	120 J	768	10	1398	60	5.2	18.68	US	5999110825557
51H392	11L-15FI	LR F	128 J	778	11	1797	60	6.2	25.1	US	5999110803203
51H386	11L-15FI	LR D	120 J	778	11	1398	60	4.1	21.4	US	5999110803197
6A0971	31 x 13.50-15 NHS	12	124 B	787	358	1600	50	5.2	29	US	5999110835341
6A0562	12.5L-15FI	LR F	134 G	826	328	2106	88	6.2	35.32	US	5999110803210
51F350	16.5L-16.10SL	10	138 B	1037	18	2359	30	2.5	46.22	US	5999110803227

## FARM SPECIALIST F-2

### Front Tractor, Field Equipment

The Farm Specialist F-2 tire is a proven tire for front steering 2-wheel drive tractor applications. Its 3 rib design is optimal for steering response in loose and cultivated soils and has added stability with its wide center and shoulder ribs. Made in the USA.



Item Number	Size	Star/PLY	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (Kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
52F230	4.00-15SL F-2	4	62 A8	617.2	111.8	265	40	3.6	4.15	US	5999110825748
52F290	7.5L-15SL F-2	6	93 A8	739.1	203.2	650	40	3	12.4	US	5999110825168



## FARM SPECIALIST F-3

### Front Tractor, Wagons, Balers, Spreaders, Seeders, And Feed Yard Mixers

Primarily used on front tractor steering applications, the Farm Specialist F-3 tire offers a rugged and heavier tread construction for resistance to chipping, cracking and rib tearing. Its tightly grooved zig-zag tread is designed for turf protection and engineered to channel water in wet terrain. Made in the USA.




Item Number	Size	Star/PLY	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (Kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
565315	11.00-16	10		839	280	1121	25	3.6	25.06	US	5999110803302

## FARM SPECIALIST HF-1

### Wagons, Balers Spreaders, Seeders & Feed Yard Mixers

The Farm Specialist HF-1 implement tire is designed for higher performance applications with heavier loads and when high flotation is needed. Tough compound used for higher performance on wagons, tankers, seeders, balers and other flotation devices. Made in the USA.

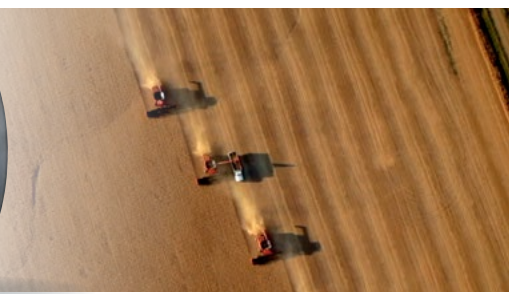

Item Number	Size	Star/PLY	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (Kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
51F378	25x7.50-15 NHS HF-1	6	88 B	640.1	190.5	560	50	3.1	10.1	US	5999110803234
51F395	27x9.50-15 NHS HF-1	6	97 B	685.8	242.6	730	50	3.1	12.64	US	5999110803463
51F396	31x13.50-15 NHS HF-1	6	106 B	807.7	342.9	950	50	2.1	24.9	US	5999110803258
51F397	31x13.50-15 NHS HF-1	8	120 B	807.7	350.5	1188	50	3.1	26.68	US	5999110825175
6A0969	31x13.50-15 IMP	8	114 B	777.2	353.1	1180	50	3.1	25.4	US	5999110830377
51F307	31x13.50-15 NHS HF-1	10	120 B	812.8	355.6	1400	50	4.15	28.73	US	5999110825663
570060	31x13.50-15 NHS HF-1	12	124 B	815.6	369.3	1600	50	5.2	30.76	US	5999110803326

## FARM SPECIALIST R-1

### Compact Utility Tractors

Used primarily on compact utility tractors, the Farm Specialist R-1 tire features an overlapping center tread lug that performs in both wet and dry conditions. The all-purpose tire features a unique multi-angle long bar tread for aggressive performance, excellent traction and lateral stability. Made in the USA.



Item Number	Size	Star/PLY	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (Kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
6E0030	150/90-12	6	69 A6	584.2	154.9	325	30	2.75	8.2	US	5999110800462
570000	7-14	6	80 A8	688.3	188	450	40	2.5	12.07	US	5999110803630
570001	7-16	6	84 A8	756.9	185.4	500	40	2.5	12.7	US	5999110803647
6E0002	215/90-16	6	91 A8	797.6	213.4	615	40	1.9	17.9	US	5999110800424
570003	240/90-16	6	92 A8	850.9	254	630	40	2.1	25.08	US	5999110800431
570006	11.2-24	6	106 A8	1103.4	292.1	950	40	1.8	40.4	US	5999110803609
6A0429	14.9-24	6	119 A8	1257.3	375.9	1360	40	1.4	62	US	5999110800400

## FARM SPECIALIST I-1

### Wagons, Balers Spreaders, Seeders & Feed yard Mixers

Multi rib farm tire designed for flotation for use on farm implements, wagons, tanks, carts and other pull behind vehicles.



Item Number	Size	Star/PLY	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (Kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
518249	4.00-9	4	60 A8	442	122	250	30	3	2.8	US	5999110806006
518277	4.00-12	4	67 B	519	127	307	48	3	3.19	US	5999110825694
6E0030	150/90-12	6	69 A6	585	155	333	33	2.8	8.2	US	5999110800462
51F235	5.00-15SL I-1	4	79 B	641	6	431	30	2.5	24.44	US	5999110825830
510361	26x12.00-12	4	100 B	648	298	808	30	1.4	11.78	US	5999110803456
510363	26x12.00-12	10	120 B	648	298	1411	30	3.6	10.02	US	5999110825793
51F252	5.90-15SL I-1	4	85 B	669	7	518	30	2.5	6.12	US	5999110803494
51F395	27x9.50-15 HF-1	6	97 B	686	243	731	48	3.1	13.14	US	5999110803463
51F388	6.70-15SL I-1	6	97 B	717	8	731	30	3	9	US	5999110825823
51F237	7.60-15SL	8	106 B	729	8	949	30	3.6	10.67	US	5999110803524
51F337	7.60-15SL I-1	8	106 B	729	8	949	30	3.6	10.93	US	5999110803517
51F399	9.5L-14SL I-1	8	111 B	747	10	1089	30	3	13.54	US	5999110803548
51F391	11L-14SL I-1	8	112 B	752	11	1121	30	2.5	14.6	US	5999110825533
51F3D7	9.5L-15SL I-1	12	119 B	760	10	1361	30	4.4	13.88	US	5999110803562
51F344	9.5L-15SL I-1	8	112 B	760	10	1121	30	3	12.04	US	5999110803586
51F317	11L-15SL I-1	12	121 B	778	272	1452	48	3.6	18.88	US	5999110803395
51F318	11L-15SL I-1	8		778	12	1153	30	2.5	17.87	US	5999110826011
6E0002	215/90-16	6	91 A8	798	214	617	41	1.9	17.9	US	5999110800424
5EF397	31x13.50-15 HF-1	8		808	351	1189	48	3.1	26.76	US	5999110800387
51F307	31x13.50-15 HF-1	10	120 B	813	356	1398	48	4.1	28.8	US	5999110825663
6A0561	12.5L-15FI	LR D	126 G	815	321	1683	88	4.1	27.76	US	5999110825199
510130	18.00x16	10		826	432	1896	49	2.2	32.6	US	5999110825991
51F305	12.5L-15SL I-1	12	127 B	829	13	1751	30	3.6	27	US	5999110825311
51F385	10.00-15SL I-1	8	121 B	849	11	1452	30	2.8	21.05	US	5999110825762
510131	14L-16.1SL I-1	8	124 B	941	365	1597	48	1.9	31.07	US	5999110803418
6A0477	16.5-16.1SL I-1	14	145 B	1034	435	2903	48	3.3	58.06	US	5999110803425
6A0429	14.9-24	6	119 A8	1258	376	1361	40	1.4	62.14	US	5999110800400

## FARM SPECIALIST TB - RC

### Tractors, Row Crop Applications

This is the Row Crop version of the Farm Specialist Tractor Bias tire with the equivalent performance.



Item Number	Size	Star/PLY	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (Kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
6X10685	9.5-24	8	112A6	1056	232	1000	40	2.8	25.78	IN	5999110824116
6X10695	9.5-32	8	116A6	1255	235	1120	40	2.8	33	IN	5999110824123
6X10705	9.5-36	8	118A6	1355	241	1180	40	2.8	40	IN	5999110824130

# FARM SPECIALIST TB

## Tractors, General Application

Farm Specialist Tractor Bias tire is a multi-angled, curved lug bars traction tire with good self-cleaning and rider comfort. Strong and sturdy body plies for durability, cut and crack-resistant tread compound for longer service life.



Rim Ø (inch)	Product code	Size	Ply rating	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Rim Width (inch)	Static Loaded Radius (mm)	Rolling Circumference (mm)	Rated Load (kg)	Rated speed (km/h)	Inflation Pressure (bar)	Weight (kg)	Tread Depth (mm)	Origin
24	6X15293	8.3-24 TT	8	105A6/101A8	995	211	W7	469	2925	925	30	3.1	25.8	26	IND
	6X12283	9.5-24 TT	8	112A6/108A8	1056	232	W8	495	3105	1120	30	2.8	25.8	26	IND
	6X12293	11.2-24 TT	8	116A6/112A8	1105	284	W10	515	3249	1250	30	2.4	32.5	32	IND
	6X12303	12.4-24 TT	8	121A6/117A8	1160	315	W11	539	3410	1450	30	2.3	40	34	IND
	6X12313	13.6-24 TT	8	123A6/120A8	1209	345	W12	559	3556	1550	30	1.9	49.2	27	IND
	6X12323	14.9-24 TT	8	128A6/124A8	1265	378	W13	583	3710	1800	30	1.8	56.8	36	IND
26	6X15303	23.1-26 TL	12	153A6/149A8	1605	587	20.0	738	4751	3650	30	1.7	152	43	IND
28	6X12343	11.2-28 TT	8	118A6/114A8	1205	284	W10	563	3530	1320	30	2.4	36.8	32	IND
	6X12353	12.4-28 TT	8	123A6/120A8	1260	315	W11	589	3704	1550	30	2.3	45.5	34	IND
	6X12363	13.6-28 TT	8	125A6/121A8	1310	345	W12	610	3851	1650	30	2	56.7	29	IND
	6X12373	14.9-28 TT	8	130A6/126A8	1365	378	W13	634	4013	1900	30	1.8	67.6	36	IND
30	6X12453	16.9-30 TT	12	144A6/140A8	1485	529	W15L	685	4381	2800	30	2.4	83.5	38	IND
	6X12463	18.4-30 TT	10	145A6/141A8	1545	467	W16L	714	4542	2900	30	1.8	95	38.5	IND
32	6X15273	8.3-32 TT	6	105A6/101A8	1195	211	W7	572	3585	925	30	2.4	27.3	29.2	IND
	6X15313	12.4-32 TT	10	128A6/124A8	1360	325	W11	639	3998	1800	30	2.5	57	34	IND
34	6X15323	16.9-34 TT	10	142A6/138A8	1585	429	W15L	735	4650	2650	30	2	90.7	38	IND
	6X12473	18.4-34 TT	10	142A6/137A8	1650	467	W16L	762	4850	2650	30	1.8	103.8	38.5	IND
36	6X15283	8.3-36 TT	6	107A6/103A8	1295	211	W7	596	3820	975	30	2.4	34.5	26	IND
	6X15333	12.4-36 TT	10	131A6/127A8	1465	315	W11	686	4318	1950	30	2.9	54.3	30	IND
	6X15343	13.6-36 TT	6	125A6/121A8	1515	345	W12	710	4445	1650	30	1.5	60.5	30	IND
38	6X15353	16.9-38 TT	10	143A6/139A8	1685	429	W15L	788	4954	2725	30	2.1	98	38	IND
	6X12483	18.4-38 TT	10	143A6/139A8	1750	467	W16L	812	5163	2725	30	1.4	114	38.5	IND

# FARM SPECIALIST TR - II BIG VOLUME, HARVESTER

## Varios Farming, Large Tractor Applications

The FSTR-II is a line of R1-W radial tires with rim diameters ranging from a 16" to 48". The radial construction of these tires will deliver the traction and smooth ride for farmers to increase their efficiency in the field.



Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
26"	6X11861	750/65R26 158A8/158B TL	761	1600	710	4761	DW25B	217	46											
										<b>Max Load (kg)</b>										
										<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5470	6450	7330	8210	8990	9775				
										10 km/h	3570	4210	4780	5355	5865	6375				
										25 km/h	2640	3110	3540	3960	4340	4720				
										30 km/h	2550	3000	3410	3820	4180	4550				
										40 km/h	2380	2805	3190	3570	3910	4250				
										50 km/h	2380	2805	3190	3570	3910	4250				
										65 km/h										
26"	6X11871	750/65R26 166A8/166B TL	761	1600	710	4761	DW25B	223	46											
										<b>Max Load (kg)</b>										
										<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5470	6450	7330	8210	8990	9775	10850	12190		
										10 km/h	3570	4210	4780	5355	5865	6375	7075	7950		
										25 km/h	2640	3110	3540	3960	4340	4720	5235	5880		
										30 km/h	2550	3000	3410	3820	4180	4550	5050	5670		
										40 km/h	2380	2805	3190	3570	3910	4250	4720	5300		
										50 km/h	2380	2805	3190	3570	3910	4250	4720	5300		
										65 km/h										
26"	6X11841	620/75R26 166A8/166B TL	641	1605	722	4778	DW20B	186	45											
										<b>Max Load (kg)</b>										
										<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4510	5360	6095	6825	7435	8045	9140	10240	11215	12190
										10 km/h	2940	3500	3975	4450	4850	5250	5960	6680	7310	7950
										25 km/h	2180	2590	2940	3290	3590	3880	4410	4940	5410	5880
										30 km/h	2100	2495	2835	3175	3460	3740	4250	4760	5220	5670
										40 km/h	1960	2330	2650	2970	3230	3500	3975	4450	4875	5300
										50 km/h	1960	2330	2650	2970	3230	3500	3975	4450	4875	5300
										65 km/h										
32"	6X11851	650/75R32 172A8/172B TL	658	1796	810	5362	DW21B	254	48											
										<b>Max Load (kg)</b>										
										<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5515	6520	7395	8270	9025	9780	11155	12535	13330	14490
										10 km/h	3600	4250	4820	5395	5885	6380	7275	8175	8690	9450
										25 km/h	2660	3145	3570	3990	4355	4720	5380	6050	6430	6990
										30 km/h	2565	3030	3440	3850	4200	4550	5190	5830	6200	6740
										40 km/h	2400	2830	3215	3600	3920	4250	4850	5450	5795	6300
										50 km/h	2400	2830	3215	3600	3920	4250	4850	5450	5795	6300
										65 km/h										



Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
32"	6X11751	800/65R32 172A8/172B TL	797	1833	820	5460	DW25B	304	57		
<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static	7020	8270	9400	10530	11530	12535	12895	14490		
	10 km/h	4580	5395	6130	6870	7520	8175	8410	9450		
	25 km/h	3390	3990	4540	5080	5565	6050	6220	6990		
	30 km/h	3265	3850	4370	4900	5365	5830	6000	6740		
	40 km/h	3050	3600	4090	4580	5010	5450	5610	6300		
	50 km/h	3050	3600	4090	4580	5010	5450	5610	6300		
	65 km/h										
32"	6X11761	800/65R32 178A8/178B TL	797	1833	820	5460	DW27B	310	57		
<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static	7020	8270	9400	10530	11530	12535	12895	14490	15870	17250
	10 km/h	4580	5395	6130	6870	7520	8175	8410	9450	10350	11250
	25 km/h	3390	3990	4540	5080	5565	6050	6220	6990	7660	8325
	30 km/h	3265	3850	4370	4900	5365	5830	6000	6740	7380	8025
	40 km/h	3050	3600	4090	4580	5010	5450	5610	6300	6900	7500
	50 km/h	3050	3600	4090	4580	5010	5450	5610	6300	6900	7500
	65 km/h										
32"	6X11771	IF800/65R32 181B/181D TL	797	1833	820	5460	DW28B	327	57		
<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static	7020	8350	9490	10625	11575	12520	14230	15940	17460	18975
	10 km/h	4580	5445	6190	6930	7550	8170	9280	10395	11385	12375
	25 km/h	3390	4030	4580	5130	5585	6040	6870	7690	8425	9160
	30 km/h	3265	3880	4410	4940	5385	5825	6620	7415	8120	8830
	40 km/h	3140	3740	4250	4760	5180	5610	6370	7140	7820	8500
	50 km/h	3050	3630	4125	4620	5030	5445	6190	6930	7590	8250
	65 km/h	3050	3630	4125	4620	5030	5445	6190	6930	7590	8250
32"	6X11801	IF1050/50R32 185B/185D TL	1038	1863	833	5686	36.0 VA	371	40		
<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static	9360	11060	12550	14040	15320	16595	17460	18935	18975	21275
	10 km/h	6105	7215	8185	9160	9990	10820	11385	12350	12375	13875
	25 km/h	4520	5340	6060	6780	7390	8010	8425	9140	9160	10270
	30 km/h	4355	5150	5840	6530	7125	7720	8120	8810	8830	9900
	40 km/h	4190	4950	5620	6290	6860	7430	7820	8480	8500	9530
	50 km/h	4070	4810	5460	6105	6660	7215	7590	8230	8250	9250
	65 km/h	4070	4810	5460	6105	6660	7215	7590	8230	8250	9250
32"	6X11781	IF900/60R32 185B/185D TL	891	1910	855	5688	DW31B	385	56		
<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static	7870	9360	10640	11910	12980	14040	15955	17870	19570	21275
	10 km/h	5130	6105	6940	7770	8460	9160	10405	11655	12765	13875
	25 km/h	3800	4520	5130	5750	6260	6780	7700	8625	9445	10270
	30 km/h	3660	4355	4950	5540	6040	6530	7420	8310	9105	9900
	40 km/h	3525	4190	4760	5335	5810	6290	7145	8000	8765	9530
	50 km/h	3420	4070	4625	5180	5640	6105	6940	7770	8510	9250
	65 km/h	3420	4070	4625	5180	5640	6105	6940	7770	8510	9250

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
38"	6X11791	IF800/70R38 184B/184D TL	805	2085	927	6190	DW27B	398	60		
<b>Max Load (kg)</b>											
<b>Speed \ Pressure (bar)</b>		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static		9110	10760	12210	13660	14900	16145	18420	20700		
10 km/h		5940	7020	7965	8910	9720	10530	12015	13500		
25 km/h		4395	5195	5890	6590	7190	7790	8890	9990		
30 km/h		4240	5010	5680	6355	6930	7510	8570	9630		
40 km/h		4080	4820	5470	6120	6670	7230	8250	9270		
50 km/h		3960	4680	5310	5940	6480	7020	8010	9000		
65 km/h		3960	4680	5310	5940	6480	7020	8010	9000		

## FARM SPECIALIST TR - II 65 SERIES

### Varios Farming, Tractor Applications

Superior radial construction for optimum ground pressure distribution and low ground compaction. Good self-cleaning properties due to specially angled lugs. Excellent driving on and off-the-road. Superior tire life.



Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
24"	6X11601	440/65R24 128D/131A8 TL	437	1190	530	3556	W14L	75	45		
<b>Max Load (kg)</b>											
<b>Speed \ Pressure (bar)</b>		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static		2510	2960	3360	3770	4125	4485				
10 km/h		1640	1930	2190	2460	2690	2925				
25 km/h		1210	1430	1620	1820	1990	2165				
30 km/h		1170	1380	1565	1750	1920	2090				
40 km/h		1090	1290	1460	1640	1790	1950				
50 km/h		1040	1230	1395	1565	1710	1890				
65 km/h		990	1170	1330	1490	1630	1800				
24"	6X11621	480/65R24 133D/136A8 TL	469	1224	541	3653	W15L	83	46		
<b>Max Load (kg)</b>											
<b>Speed \ Pressure (bar)</b>		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
Static		2880	3410	3890	4370	4740	5150				
10 km/h		1880	2220	2540	2850	3090	3360				
25 km/h		1390	1645	1880	2110	2290	2485				
30 km/h		1340	1585	1810	2030	2205	2400				
40 km/h		1250	1480	1690	1900	2060	2240				
50 km/h		1195	1420	1615	1840	1970	2165				
65 km/h		1140	1350	1540	1750	1875	2060				

Farm Specialist TR-II 65 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
24"	6X11641	540/65R24 140D/143A8 TL	540	1316	585	3918	W16L	114,5	48											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3510	4140	4700	5265	5765	6270				
										10 km/h	2290	2700	3065	3430	3760	4090				
										25 km/h	1690	1995	2270	2540	2780	3025				
										30 km/h	1630	1920	2190	2450	2680	2915				
										40 km/h	1525	1800	2040	2290	2510	2725				
										50 km/h	1460	1720	1955	2185	2395	2625				
										65 km/h	1390	1640	1860	2080	2280	2500				
										28"	6X11611	440/65R28 131D/134A8 TL	439	1288	579	3862	W14L	84	45	
<b>Max Load (kg)</b>																				
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	2730	3220	3660	4095	4485	4875														
10 km/h	1780	2100	2385	2670	2925	3180														
25 km/h	1320	1550	1765	1980	2165	2350														
30 km/h	1270	1500	1700	1905	2090	2270														
40 km/h	1190	1400	1590	1780	1950	2120														
50 km/h	1135	1335	1525	1700	1865	2050														
65 km/h	1080	1270	1450	1620	1775	1950														
28"	6X11631	480/65R28 136D/139A8 TL	466	1336	593	4002	W15L	92	46											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3130	3690	4190	4695	5140	5590				
										10 km/h	2040	2405	2730	3060	3350	3645				
										25 km/h	1510	1780	2020	2265	2480	2700				
										30 km/h	1455	1715	1950	2180	2390	2600				
										40 km/h	1360	1600	1820	2040	2235	2430				
										50 km/h	1300	1535	1745	1955	2130	2350				
										65 km/h	1240	1460	1660	1860	2030	2240				
										28"	6X11651	540/65R28 142D/145A8 TL	533	1424	631	4257	W16L	128	48	
<b>Max Load (kg)</b>																				
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	3735	4400	5000	5600	6140	6670														
10 km/h	2435	2870	3260	3650	4000	4350														
25 km/h	1800	2125	2410	2700	2960	3220														
30 km/h	1740	2050	2330	2610	2850	3100														
40 km/h	1620	1910	2175	2435	2670	2900														
50 km/h	1555	1825	2080	2330	2550	2785														
65 km/h	1480	1740	1980	2220	2430	2650														
28"	6X11691	600/65R28 147D/150A8 TL	593	1486	652	4364	W18L	143	49											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4400	5200	5940	6670	7090	7705				
										10 km/h	2870	3390	3870	4350	4620	5025				
										25 km/h	2125	2510	2865	3220	3420	3720				
										30 km/h	2050	2420	2760	3100	3300	3580				
										40 km/h	1910	2260	2580	2900	3080	3350				
										50 km/h	1825	2165	2470	2785	2945	3230				
										65 km/h	1740	2060	2350	2650	2805	3075				

Farm Specialist TR-II 65 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)			
30"	<b>6X11661</b>	540/65R30 143D/146A8 TL	535	1477	653	4422	W16L	135	48			
	<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>		<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static		3860	4550	5175	5795	6350	6900				
	10 km/h		2520	2970	3375	3780	4140	4500				
	25 km/h		1860	2200	2500	2800	3060	3330				
	30 km/h		1800	2120	2410	2700	2950	3210				
	40 km/h		1680	1980	2250	2520	2760	3000				
	50 km/h		1605	1890	2155	2405	2635	2860				
	65 km/h		1530	1800	2050	2290	2510	2725				
34"	<b>6X11671</b>	540/65R34 145D/148A8 TL	539	1581	716	4746	W16L	138	48			
	<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>		<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static		4140	4890	5580	6270	6665	7245				
	10 km/h		2700	3190	3640	4090	4350	4725				
	25 km/h		1995	2360	2690	3020	3220	3500				
	30 km/h		1920	2270	2595	2915	3100	3370				
	40 km/h		1800	2125	2425	2725	2900	3150				
	50 km/h		1720	2025	2320	2625	2770	3045				
	65 km/h		1640	1930	2210	2500	2640	2900				
34"	<b>6X11701</b>	600/65R34 151D/154A8 TL	539	1581	716	4746	W18L	138	48			
	<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>		<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static		4780	5650	6450	7245	7935	8625				
	10 km/h		3120	3685	4205	4725	5175	5625				
	25 km/h		2310	2730	3110	3500	3830	4160				
	30 km/h		2225	2630	3000	3370	3690	4010				
	40 km/h		2080	2460	2800	3150	3450	3750				
	50 km/h		1985	2345	2680	3045	3295	3625				
	65 km/h		1890	2235	2550	2900	3140	3450				
38"	<b>6X11681</b>	540/65R38 147D/150A8 TL	539	1682	759	5058	W16L	151	48			
	<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>		<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static		4315	5085	5780	6470	7090	7705				
	10 km/h		2810	3320	3770	4220	4620	5025				
	25 km/h		2080	2450	2790	3120	3420	3720				
	30 km/h		2010	2365	2690	3010	3300	3585				
	40 km/h		1875	2210	2510	2810	3080	3350				
	50 km/h		1795	2110	2400	2690	2945	3230				
	65 km/h		1710	2010	2285	2560	2805	3075				
38"	<b>6X11711</b>	600/65R38 153D/156A8 TL	604	1768	796	5311	W18L	190	49			
	<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>		<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static		5085	6010	6860	7705	8460	9200				
	10 km/h		3320	3920	4470	5025	5520	6000				
	25 km/h		2450	2900	3310	3720	4085	4440				
	30 km/h		2365	2795	3190	3585	3940	4280				
	40 km/h		2210	2610	2980	3350	3680	4000				
	50 km/h		2110	2500	2845	3230	3520	3835				
	65 km/h		2010	2380	2710	3075	3350	3650				



Farm Specialist TR-II 65 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
38"	6X11721	650/65R38 157D/160A8 TL	653	1812	815	5439	DW20B	239	51											
										<b>Max Load (kg)</b>										
										<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
										Static	5795	6830	7760	8690	9520	10350				
										10 km/h	3780	4455	5060	5670	6210	6750				
										25 km/h	2800	3300	3745	4195	4595	4995				
										30 km/h	2700	3180	3610	4045	4430	4815				
										40 km/h	2520	2970	3375	3780	4140	4500				
										50 km/h	2405	2835	3225	3610	3960	4330				
										65 km/h	2290	2700	3070	3440	3770	4125				
42"	6X11731	650/65R42 158D/161A8 TL	651	1921	865	5775	DW20B	261	51											
										<b>Max Load (kg)</b>										
										<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
										Static	5960	7020	7980	8935	9790	10640				
										10 km/h	3885	4580	5200	5830	6380	6940				
										25 km/h	2875	3390	3850	4310	4720	5130				
										30 km/h	2770	3265	3710	4160	4550	4950				
										40 km/h	2590	3050	3470	3885	4255	4625				
										50 km/h	2480	2920	3320	3710	4065	4465				
										65 km/h	2360	2780	3160	3535	3870	4250				
42"	6X11741	650/65R42 165D/168A8 TL	651	1921	865	5775	DW20B	275	51											
										<b>Max Load (kg)</b>										
										<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
										Static	5960	7020	7980	8935	9790	10640	11460	12880		
										10 km/h	3885	4580	5200	5830	6380	6940	7475	8400		
										25 km/h	2875	3390	3850	4310	4720	5130	5530	6215		
										30 km/h	2770	3265	3710	4160	4550	4950	5330	5990		
										40 km/h	2590	3050	3470	3885	4255	4625	4980	5600		
										50 km/h	2480	2920	3320	3710	4065	4465	4760	5410		
										65 km/h	2360	2780	3160	3535	3870	4250	4535	5150		

# FARM SPECIALIST TR - II 70 SERIES

## Varios Farming, Tractor Applications

The FSTR-II is a line of R1-W radial tires with diameters ranging from a 16" to 48". The radial construction of these tires will deliver the traction and smooth ride for farmers to increase their efficiency in the field.



Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
16"	6X11911	260/70R16 109A8/109B TL	250	767	345	2293	W8	23,5	31											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static										2370
										10 km/h										1545
										25 km/h										1130
										30 km/h										1100
										40 km/h										1030
										50 km/h										1030
										65 km/h										
16"	6X11921	280/70R16 112A8/112B TL	273	787	357	2350	W9	25,5	32											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						1955	2290	2575		
										10 km/h						1275	1495	1680		
										25 km/h						935	1095	1230		
										30 km/h						910	1070	1200		
										40 km/h						850	1000	1120		
										50 km/h						850	1000	1120		
										65 km/h										
16"	6X11931	280/70R18 114A8/114B TL	273	849	385	2542	W9	29	32											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						2070	2415	2710		
										10 km/h						1350	1575	1770		
										25 km/h						990	1155	1300		
										30 km/h						960	1120	1260		
										40 km/h						900	1050	1180		
										50 km/h						900	1050	1180		
										65 km/h										
20"	6X11941	280/70R20 116A8/116B TL	273	899	412	2698	W9	32	32											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static										2875
										10 km/h										1875
										25 km/h										1375
										30 km/h										1340
										40 km/h										1250
										50 km/h										1250
										65 km/h										

Farm Specialist TR-II 70 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
20"	6X11951	300/70R20 120A8/120B TL	290	948	427	2840	W9	36	33											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						2440	2865	3220		
										10 km/h						1590	1870	2100		
										25 km/h						1165	1370	1540		
										30 km/h						1130	1330	1500		
										40 km/h						1060	1245	1400		
										50 km/h						1060	1245	1400		
										65 km/h										
20"	6X11961	320/70R20 123A8/123B TL	316	985	450	2947	W10	40	34											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						2645	3170	3565		
										10 km/h						1725	2070	2325		
										25 km/h						1265	1520	1705		
										30 km/h						1230	1475	1660		
										40 km/h						1150	1380	1550		
										50 km/h						1150	1380	1550		
										65 km/h										
24"	6X11381	360/70R24 122A8/122B TL	354	1135	518	3398	W11	60	42											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	1930	2280	2590	2900	3170	3450				
										10 km/h	1260	1485	1690	1890	2070	2250				
										25 km/h	930	1100	1250	1400	1530	1665				
										30 km/h	900	1060	1200	1350	1480	1605				
										40 km/h	840	990	1125	1260	1380	1500				
										50 km/h	840	990	1125	1260	1380	1500				
										65 km/h										
24"	6X11401	380/70R24 125A8/125B TL	384	1198	533	3574	W12	65	42											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2125	2505	2845	3190	3490	3795				
										10 km/h	1385	1630	1855	2080	2280	2475				
										25 km/h	1025	1210	1370	1540	1685	1830				
										30 km/h	990	1165	1320	1480	1620	1765				
										40 km/h	920	1090	1240	1385	1520	1650				
										50 km/h	920	1090	1240	1385	1520	1650				
										65 km/h										
24"	6X11421	420/70R24 130A8/130B TL	426	1231	563	3675	W13	81	45											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2450	2880	3280	3670	4020	4370				
										10 km/h	1595	1880	2140	2390	2620	2850				
										25 km/h	1180	1390	1580	1770	1940	2110				
										30 km/h	1140	1340	1525	1710	1870	2030				
										40 km/h	1060	1250	1425	1595	1750	1900				
										50 km/h	1060	1250	1425	1595	1750	1900				
										65 km/h										

Farm Specialist TR-II 70 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
24"	6X11451	480/70R24 138A8/138B TL	488	1314	580	3913	W15L	101	47											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3040	3580	4070	4560	4990	5430				
										10 km/h	1980	2335	2655	2970	3260	3540				
										25 km/h	1470	1730	1965	2200	2410	2620				
										30 km/h	1410	1670	1890	2120	2320	2525				
										40 km/h	1320	1560	1770	1980	2170	2360				
										50 km/h	1320	1560	1770	1980	2170	2360				
										65 km/h										
28"	6X11391	360/70R28 125A8/125B TL	356	1258	566	3777	W11	67	42											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2125	2505	2845	3190	3490	3795				
										10 km/h	1385	1630	1855	2080	2280	2475				
										25 km/h	1025	1210	1370	1540	1685	1830				
										30 km/h	990	1165	1320	1480	1620	1765				
										40 km/h	920	1090	1240	1385	1520	1650				
										50 km/h	920	1090	1240	1385	1520	1650				
										65 km/h										
28"	6X11411	380/70R28 127A8/127B TL	382	1304	589	3903	W12	73	42											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2250	2660	3020	3380	3700	4025				
										10 km/h	1470	1730	1970	2205	2415	2625				
										25 km/h	1090	1280	1460	1630	1790	1940				
										30 km/h	1050	1235	1400	1570	1720	1870				
										40 km/h	980	1155	1310	1470	1610	1750				
										50 km/h	980	1155	1310	1470	1610	1750				
										65 km/h										
28"	6X11431	420/70R28 133A8/133B TL	414	1350	597	4044	W13	90	45											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2650	3130	3550	3980	4360	4740				
										10 km/h	1730	2040	2320	2595	2840	3090				
										25 km/h	1280	1510	1715	1920	2100	2290				
										30 km/h	1230	1455	1650	1850	2030	2200				
										40 km/h	1150	1360	1545	1730	1895	2060				
										50 km/h	1150	1360	1545	1730	1895	2060				
										65 km/h										
28"	6X11461	480/70R28 140A8/140B TL	477	1431	643	4279	W15L	111	47											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3220	3795	4310	4830	5290	5750				
										10 km/h	2100	2475	2810	3150	3450	3750				
										25 km/h	1550	1830	2080	2330	2550	2775				
										30 km/h	1500	1765	2005	2250	2460	2675				
										40 km/h	1400	1650	1875	2100	2300	2500				
										50 km/h	1400	1650	1875	2100	2300	2500				
										65 km/h										



Farm Specialist TR-II 70 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)																					
30"	<b>6X11441</b>	420/70R30 134A8/134B TL	422	1384	615	4153	W13	95	45	<b>Max Load (kg)</b>																				
										<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2										
										Static	2730	3220	3660	4095	4485	4875														
										10 km/h	1780	2100	2385	2670	2925	3180														
										25 km/h	1320	1550	1765	1980	2165	2350														
										30 km/h	1270	1500	1700	1905	2090	2270														
										40 km/h	1190	1400	1590	1780	1950	2120														
										50 km/h	1190	1400	1590	1780	1950	2120														
										65 km/h																				
										30"	<b>6X11471</b>	480/70R30 141A8/141B TL	480	1463	653	4382	W15L	117	47	<b>Max Load (kg)</b>										
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
																				Static	3320	3910	4440	4975	5450	5920				
10 km/h	2160	2550	2900	3245	3550	3860																								
25 km/h	1600	1885	2140	2400	2630	2860																								
30 km/h	1540	1820	2065	2310	2535	2755																								
40 km/h	1440	1700	1930	2160	2370	2575																								
50 km/h	1440	1700	1930	2160	2370	2575																								
65 km/h																														
30"	<b>6X11501</b>	520/70R30 151A8/151B TL	522	1528	692	4572	W16L	148	48											<b>Max Load (kg)</b>										
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
																				Static	3735	4400	5000	5600	6135	6670	7060	7935		
										10 km/h	2435	2870	3260	3650	4000	4350	4605	5175												
										25 km/h	1800	2125	2410	2700	2960	3220	3410	3830												
										30 km/h	1740	2050	2330	2610	2855	3100	3285	3690												
										40 km/h	1620	1910	2175	2435	2670	2900	3070	3450												
										50 km/h	1620	1910	2175	2435	2670	2900	3070	3450												
										65 km/h																				
										30"	<b>6X13961</b>	600/70R30 152D/155A8 TL	586	1610	716	4804	DW20B	179	51	<b>Max Load (kg)</b>										
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
																				Static	4990	5880	6680	7490	8200	8910				
10 km/h	3255	3835	4360	4880	5350	5810																								
25 km/h	2410	2840	3225	3610	3960	4300																								
30 km/h	2320	2740	3110	3480	3815	4145																								
40 km/h	2170	2560	2905	3255	3565	<b>3875</b>																								
50 km/h	2075	2445	2775	3110	3400	3730																								
65 km/h	1975	2330	2645	2960	3240	<b>3550</b>																								
34"	<b>6X11481</b>	480/70R34 143A8/143B TL	487	1571	720	4717	W15L	129	47											<b>Max Load (kg)</b>										
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
																				Static	3510	4140	4700	5265	5765	6270				
										10 km/h	2290	2700	3065	3430	3760	4090														
										25 km/h	1690	1995	2270	2540	2780	3025														
										30 km/h	1630	1920	2190	2450	2680	2915														
										40 km/h	1525	1800	2040	2290	2510	2725														
										50 km/h	1525	1800	2040	2290	2510	2725														
										65 km/h																				

Farm Specialist TR-II 70 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
34"	6X11511	520/70R34 148A8/148B TL	530	1639	739	4916	W16L	155	48											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4060	4780	5430	6085	6665	7245				
										10 km/h	2645	3120	3540	3970	4350	4725				
										25 km/h	1960	2310	2620	2940	3220	3500				
										30 km/h	1890	2225	2530	2830	3100	3370				
										40 km/h	1760	2080	2360	2645	2900	3150				
										50 km/h	1760	2080	2360	2645	2900	3150				
										65 km/h										
34"	6X11561	600/70R34 160D/163A8 TL	586	1705	784	5107	DW20B	202	51											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4930	5830	6615	7400	8070	8745	9980	11210		
										10 km/h	3220	3800	4310	4825	5265	5700	6510	7310		
										25 km/h	2380	2810	3190	3570	3895	4220	4815	5410		
										30 km/h	2295	2710	3080	3440	3755	4070	4640	5215		
										40 km/h	2145	2535	2875	3220	3510	3800	4340	4875		
										50 km/h	2050	2425	2750	3075	3350	3635	4150	4725		
										65 km/h	1950	2310	2620	2930	3190	3460	3950	4500		
38"	6X11491	480/70R38 145A8/145B TL	483	1683	763	5062	W15L	143	47											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3735	4400	5000	5600	6135	6670				
										10 km/h	2435	2870	3260	3650	4000	4350				
										25 km/h	1800	2125	2410	2700	2960	3220				
										30 km/h	1740	2050	2330	2610	2855	3100				
										40 km/h	1620	1910	2175	2435	2670	2900				
										50 km/h	1620	1910	2175	2435	2670	2900				
										65 km/h										
38"	6X11521	520/70R38 150A8/150B TL	529	1743	787	5238	W16L	168	48											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4315	5085	5780	6470	7090	7705				
										10 km/h	2810	3320	3770	4220	4620	5025				
										25 km/h	2080	2450	2790	3120	3420	3720				
										30 km/h	2010	2365	2690	3010	3300	3585				
										40 km/h	1875	2210	2510	2810	3080	3350				
										50 km/h	1875	2210	2510	2810	3080	3350				
										65 km/h										
38"	6X13981	580/70R38 155D/158A8 TL	580	1822	811	5465	W18L	203	51											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5470	6450	7350	8210	8990	9775				
										10 km/h	3570	4210	4780	5355	5865	6375				
										25 km/h	2640	3110	3540	3960	4340	4720				
										30 km/h	2550	3000	3410	3820	4180	4550				
										40 km/h	2380	2805	3190	3570	3910	4250				
										50 km/h	2275	2680	3045	3415	3740	4070				
										65 km/h	2165	2550	2900	3250	3560	3875				

Farm Specialist TR-II 70 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
38"	6X11541	580/70R38 170A8/170B TL	580	1822	811	5465	W18L	224	51											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4990	5880	6680	7490	8200	8910	11315	12560	13800	
										10 km/h	3255	3835	4360	4880	5350	5810	7380	8190	9000	
										25 km/h	2410	2840	3225	3610	3960	4300	5460	6060	6660	
										30 km/h	2320	2740	3110	3480	3815	4145	5260	5840	6420	
										40 km/h	2170	2560	2905	3255	3565	3875	4920	5460	6000	
										50 km/h	2170	2560	2905	3255	3565	3875	4920	5460	6000	
										65 km/h										
										38"	6X13951	710/70R38 166D/169A8 TL	741	1950	863	5837	DW23B	291	58	
																				<b>Max Load (kg)</b>
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	7470	8800	10005	11205	12270	13340														
10 km/h	4870	5740	6525	7310	8000	8700														
25 km/h	3605	4250	4830	5410	5920	6440														
30 km/h	3475	4095	4655	5210	5710	6205														
40 km/h	3250	3830	4350	4870	5335	5800														
50 km/h	3105	3655	4160	4650	5100	5565														
65 km/h	2955	3480	3960	4430	4855	5300														
42"	6X11551	580/70R42 158A8/158B TL	575	1870	835	5625	W18L	216	51											
																				<b>Max Load (kg)</b>
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	5470	6450	7330	8210	8990	9775				
										10 km/h	3570	4210	4780	5355	5865	6375				
										25 km/h	2640	3110	3540	3960	4340	4720				
										30 km/h	2550	3000	3410	3820	4180	4550				
										40 km/h	2380	2805	3190	3570	3910	4250				
										50 km/h	2380	2805	3190	3570	3910	4250				
										65 km/h										
										42"	6X11571	620/70R42 160A8/160B TL	626	1917	841	5762	DW20B	238	52	
																				<b>Max Load (kg)</b>
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	5795	6830	7760	8690	9520	10350														
10 km/h	3780	4455	5060	5670	6210	6750														
25 km/h	2800	3300	3745	4195	4595	4995														
30 km/h	2695	3180	3610	4045	4430	4815														
40 km/h	2520	2970	3375	3780	4140	4500														
50 km/h	2520	2970	3375	3780	4140	4500														
65 km/h																				
42"	6X13971	710/70R42 173D/176A8 TL	743	2079	937	6234	DW23B	329	58											
																				<b>Max Load (kg)</b>
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	7920	9335	10610	11880	13010	14145	13305	14950		
										10 km/h	5165	6090	6920	7750	8490	9225	8680	9750		
										25 km/h	3820	4505	5120	5730	6280	6830	6420	7215		
										30 km/h	3685	4340	4935	5530	6050	6580	6190	6955		
										40 km/h	3440	4060	4610	5165	5660	6150	5785	6500		
										50 km/h	3285	3875	4410	4935	5410	5880	5525	7455		
										65 km/h	3130	3690	4200	4700	5150	5600	5260	7100		

## Farm Specialist TR-II 70 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
42"	<b>6X11591</b>	710/75R42 175D/178A8 TL	728	2127	961	6356	DW23B	370	62		
<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static	7590	8970	10180	11385	12420	13455	15350	17250		
	10 km/h	4950	5850	6640	7425	8100	8775	10010	11250		
	25 km/h	3660	4330	4910	5495	5990	6490	7410	8325		
	30 km/h	3530	4170	4735	5300	5780	6260	7140	8025		
	40 km/h	3300	3900	4425	4950	5400	5850	6675	7500		
	50 km/h	3150	3730	4230	4730	5155	5585	6375	7245		
	65 km/h	3000	3550	4030	4505	4910	5320	6070	6900		

## FARM SPECIALIST TR - II 80 SERIES

### Variuos Farming, Tractor Applications

Superior radial construction for optimum ground pressure distribution and low ground compaction. Good self-cleaning properties due to specially angled lugs. Excellent driving on and off-the-road. Superior tire life.



Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)		
38"	<b>6X11131</b>	380/80R38 142A8/142B TL	377	1595	738	4803	W12	97	46		
<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static	2680	3170	3595	4020	4390	4750	5425	6095		
	10 km/h	1750	2070	2345	2620	2860	3100	3540	3975		
	25 km/h	1290	1530	1735	1940	2120	2290	2620	2940		
	30 km/h	1250	1470	1670	1870	2040	2210	2520	2835		
	40 km/h	1165	1380	1560	1750	1910	2070	2360	2650		
	50 km/h	1165	1380	1560	1750	1910	2070	2360	2650		
	65 km/h										
46"	<b>6X11831</b>	420/80R46 151A8/151B TL	398	1848	849	5272	W13	142	40		
<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static	3490	4125	4680	5240	5710	6190	7060	7935		
	10 km/h	2280	2690	3050	3415	3725	4040	4605	5175		
	25 km/h	1685	1990	2260	2530	2760	2990	3410	3830		
	30 km/h	1620	1920	2180	2435	2660	2880	3285	3690		
	40 km/h	1520	1790	2035	2280	2480	2690	3070	3450		
	50 km/h	1520	1790	2035	2280	2480	2690	3070	3450		
	65 km/h										



## Farm Specialist TR-II 80 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
46"	6X11321	480/80R46 158A8/158B TL	490	1971	905	5936	DW16L	188	49											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4300	5080	5770	6450	7040	7625	8700	9775		
										10 km/h	2805	3315	3760	4210	4590	4970	5670	6375		
										25 km/h	2075	2450	2780	3110	3400	3680	4200	4720		
										30 km/h	2000	2365	2680	3000	3270	3550	4050	4550		
										40 km/h	1870	2210	2510	2805	3060	3315	3780	4250		
										50 km/h	1870	2210	2510	2805	3060	3315	3780	4250		
										65 km/h										

## FARM SPECIALIST TR - II 85 SERIES

### Variuos Farming, Tractor Applications

Superior radial construction for optimum ground pressure distribution and low ground compaction. Good self-cleaning properties due to specially angled lugs. Excellent driving on and off-the-road. Superior tire life.



Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
20"	6X11061	280/85R20 112A8/112B TL	282	986	446	2943	W10	38	42											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	1440	1700	1930	2160	2370	2575				
										10 km/h	940	1110	1260	1410	1545	1680				
										25 km/h	695	820	930	1040	1140	1240				
										30 km/h	670	790	900	1010	1100	1200				
										40 km/h	630	740	840	940	1030	1120				
										50 km/h	630	740	840	940	1030	1120				
										65 km/h										
24"	6X11071	280/85R24 115A8/115B TL	285	1080	494	3239	W10	44	42											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	1565	1840	2095	2350	2570	2795				
										10 km/h	1020	1200	1370	1530	1680	1820				
										25 km/h	755	890	1010	1130	1240	1350				
										30 km/h	730	860	975	1090	1195	1300				
										40 km/h	680	800	910	1020	1120	1215				
										50 km/h	680	800	910	1020	1120	1215				
										65 km/h										

Farm Specialist TR-II 85 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
24"	6X11091	320/85R24 122A8/122B TL	322	1139	520	3400	W11	54	43											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	1930	2280	2590	2900	3170	3450				
										10 km/h	1260	1485	1690	1890	2070	2250				
										25 km/h	930	1100	1250	1400	1530	1665				
										30 km/h	900	1060	1200	1350	1480	1605				
										40 km/h	840	990	1125	1260	1380	1500				
										50 km/h	840	990	1125	1260	1380	1500				
										65 km/h										
24"	6X11111	340/85R24 125A8/125B TL	353	1191	547	3558	W12	64	45											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2125	2505	2845	3190	3490	3795				
										10 km/h	1385	1630	1855	2080	2280	2475				
										25 km/h	1025	1210	1370	1540	1685	1830				
										30 km/h	990	1165	1320	1480	1620	1765				
										40 km/h	920	1090	1240	1385	1520	1650				
										50 km/h	920	1090	1240	1385	1520	1650				
										65 km/h										
24"	6X11141	380/85R24 131A8/131B TL	382	1273	566	3794	W12	76	47											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2510	2960	3360	3770	4125	4485				
										10 km/h	1640	1930	2190	2460	2690	2925				
										25 km/h	1210	1430	1620	1820	1990	2165				
										30 km/h	1170	1380	1565	1750	1920	2090				
										40 km/h	1090	1290	1460	1640	1790	1950				
										50 km/h	1090	1290	1460	1640	1790	1950				
										65 km/h										
24"	6X11201	420/85R24 137A8/137B TL	439	1322	593	3935	W15L	88	48											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2960	3490	3970	4440	4870	5290				
										10 km/h	1930	2280	2590	2900	3170	3450				
										25 km/h	1430	1685	1915	2145	2350	2550				
										30 km/h	1380	1620	1845	2070	2260	2460				
										40 km/h	1290	1520	1725	1930	2115	2300				
										50 km/h	1290	1520	1725	1930	2115	2300				
										65 km/h										
28"	6X11081	280/85R28 118A8/118B TL	283	1182	540	3555	W10	49	42											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	1700	2000	2280	2550	2790	3035				
										10 km/h	1110	1310	1485	1660	1820	1980				
										25 km/h	820	970	1100	1230	1350	1465				
										30 km/h	790	950	1060	1185	1300	1410				
										40 km/h	740	870	990	1110	1210	1320				
										50 km/h	740	870	990	1110	1210	1320				
										65 km/h										

Farm Specialist TR-II 85 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
28"	6X11101	320/85R28 124A8/124B TL	321	1258	575	3776	W11	59	43											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2060	2430	2760	3090	3385	3680				
										10 km/h	1340	1580	1800	2015	2210	2400				
										25 km/h	995	1170	1330	1490	1630	1775				
										30 km/h	960	1130	1280	1440	1575	1710				
										40 km/h	895	1055	1200	1340	1470	1600				
										50 km/h	895	1055	1200	1340	1470	1600				
										65 km/h										
										28"	6X11121	340/85R28 127A8/127B TL	353	1308	598	3921	W12	71	45	
																				<b>Max Load (kg)</b>
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	2250	2660	3020	3380	3700	4025														
10 km/h	1470	1730	1970	2205	2415	2625														
25 km/h	1090	1280	1460	1630	1790	1940														
30 km/h	1050	1235	1400	1570	1720	1870														
40 km/h	980	1155	1310	1470	1610	1750														
50 km/h	980	1155	1310	1470	1610	1750														
65 km/h																				
28"	6X11151	380/85R28 133A8/133B TL	386	1378	627	4124	W13	82	47											
																				<b>Max Load (kg)</b>
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2650	3130	3550	3980	4360	4740				
										10 km/h	1730	2040	2320	2595	2840	3090				
										25 km/h	1280	1510	1715	1920	2100	2290				
										30 km/h	1230	1455	1650	1850	2030	2200				
										40 km/h	1150	1360	1545	1730	1895	2060				
										50 km/h	1150	1360	1545	1730	1895	2060				
										65 km/h										
										28"	6X11211	420/85R28 139A8/139B TL	439	1438	637	4298	W15L	102	48	
																				<b>Max Load (kg)</b>
Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8											3.2
Static	3130	3690	4190	4695	5140	5590														
10 km/h	2040	2405	2730	3060	3350	3645														
25 km/h	1510	1780	2020	2265	2480	2700														
30 km/h	1455	1715	1950	2180	2390	2600														
40 km/h	1360	1600	1820	2040	2235	2430														
50 km/h	1360	1600	1820	2040	2235	2430														
65 km/h																				
30"	6X11161	380/85R30 135A8/135B TL	388	1407	639	4218	W13	88	46											
																				<b>Max Load (kg)</b>
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	2810	3310	3760	4210	4610	5010				
										10 km/h	1830	2160	2450	2750	3010	3270				
										25 km/h	1355	1600	1815	2030	2225	2420				
										30 km/h	1305	1540	1750	1960	2145	2330				
										40 km/h	1220	1440	1635	1830	2005	2180				
										50 km/h	1220	1440	1635	1830	2005	2180				
										65 km/h										

Farm Specialist TR-II 85 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)			
30"	<b>6X11221</b>	420/85R30 140A8/140B TL	439	1483	674	4440	W15L	107	48			
	<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>		<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static		3220	3795	4310	4830	5290	5750				
	10 km/h		2100	2475	2810	3150	3450	3750				
	25 km/h		1550	1830	2080	2330	2550	2775				
	30 km/h		1500	1765	2005	2250	2460	2675				
	40 km/h		1400	1650	1875	2100	2300	2500				
	50 km/h		1400	1650	1875	2100	2300	2500				
	65 km/h											
30"	<b>6X11271</b>	460/85R30 145A8/145B TL	466	1527	680	4566	W16L	125	50			
	<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>		<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static		3735	4400	5000	5600	6135	6670				
	10 km/h		2435	2870	3260	3650	4000	4350				
	25 km/h		1800	2125	2410	2700	2960	3220				
	30 km/h		1740	2050	2330	2610	2855	3100				
	40 km/h		1620	1910	2175	2435	2670	2900				
	50 km/h		1620	1910	2175	2435	2670	2900				
	65 km/h											
32"	<b>6X11971</b>	320/85R32 126A8/126B TL	311	1354	623	4063	W10	65	36			
	<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>		<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static							3910				
	10 km/h							2550				
	25 km/h							1870				
	30 km/h							1820				
	40 km/h							1700				
	50 km/h							1700				
	65 km/h											
34"	<b>6X11171</b>	380/85R34 137A8/137B TL	389	1487	681	4470	W12	101	46			
	<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>		<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static		2960	3490	3970	4440	4870	5290				
	10 km/h		1930	2280	2590	2900	3170	3450				
	25 km/h		1430	1685	1915	2145	2350	2550				
	30 km/h		1380	1620	1845	2070	2260	2460				
	40 km/h		1290	1520	1725	1930	2115	2300				
	50 km/h		1290	1520	1725	1930	2115	2300				
	65 km/h											
34"	<b>6X11231</b>	420/85R34 142A8/142B TL	439	1594	710	4784	W15L	120	48			
	<b>Max Load (kg)</b>											
	<b>Speed \ Pressure (bar)</b>		<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
	Static		3410	4020	4570	5120	5610	6095				
	10 km/h		2225	2620	2980	3340	3660	3975				
	25 km/h		1650	1940	2205	2470	2705	2940				
	30 km/h		1590	1870	2130	2380	2610	2835				
	40 km/h		1480	1750	1990	2225	2440	2650				
	50 km/h		1480	1750	1990	2225	2440	2650				
	65 km/h											

Farm Specialist TR-II 85 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)																					
34"	6X11281	460/85R34 147A8/147B TL	470	1649	743	4944	W16L	143	50	<b>Max Load (kg)</b>																				
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2										
										Static	3960	4670	5300	5940	6510	7070														
										10 km/h	2580	3040	3460	3875	4240	4610														
										25 km/h	1910	2250	2560	2870	3140	3410														
										30 km/h	1840	2170	2470	2760	3030	3290														
										40 km/h	1720	2030	2305	2580	2830	3075														
										50 km/h	1720	2030	2305	2580	2830	3075														
										65 km/h																				
										34"	6X11291	460/85R34 157A8/157B TL	470	1649	743	4944	W16L	159	50	<b>Max Load (kg)</b>										
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
																				Static	3960	4670	5300	5940	6510	7070	7115	7970	8440	9490
10 km/h	2580	3040	3460	3875	4240	4610	4640	5200	5510											6190										
25 km/h	1910	2250	2560	2870	3140	3410	3430	3845	4075											4580										
30 km/h	1840	2170	2470	2760	3030	3290	3310	3710	3930											4410										
40 km/h	1720	2030	2305	2580	2830	3075	3090	3465	3670											4125										
50 km/h	1720	2030	2305	2580	2830	3075	3090	3465	3670											4125										
65 km/h																														
36"	6X11981	320/85R36 128A8/128B TL	313	1448	667	4368	W10	72	36											<b>Max Load (kg)</b>										
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
																				Static							4140			
										10 km/h							2700													
										25 km/h							1980													
										30 km/h							1925													
										40 km/h							1800													
										50 km/h							1800													
										65 km/h																				
										36"	6X11991	340/85R36 132A8/132B TL	357	1489	680	4489	W11	79	37	<b>Max Load (kg)</b>										
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
																				Static							4600			
10 km/h							3000																							
25 km/h							2200																							
30 km/h							2140																							
40 km/h							2000																							
50 km/h							2000																							
65 km/h																														
38"	6X12001	340/85R38 133A8/133B TL	353	1540	711	4645	W11	81	37											<b>Max Load (kg)</b>										
																				Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
																				Static							4740			
										10 km/h							3090													
										25 km/h							2265													
										30 km/h							2200													
										40 km/h							2060													
										50 km/h							2060													
										65 km/h																				

Farm Specialist TR-II 85 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
38"	6X11241	420/85R38 144A8/144B TL	439	1667	752	5014	W15L	127	48											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3605	4250	4830	5410	5925	6440				
										10 km/h	2350	2770	3150	3530	3860	4200				
										25 km/h	1740	2050	2330	2610	2860	3110				
										30 km/h	1680	1980	2250	2520	2755	2995				
										40 km/h	1570	1850	2100	2350	2575	2800				
										50 km/h	1570	1850	2100	2350	2575	2800				
										65 km/h										
38"	6X11301	460/85R38 149A8/149B TL	470	1737	776	5207	W16L	150	50											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4185	4930	5605	6280	6880	7475				
										10 km/h	2730	3220	3655	4095	4485	4875				
										25 km/h	2020	2380	2705	3030	3320	3610				
										30 km/h	1950	2295	2610	2920	3200	3480				
										40 km/h	1820	2145	2440	2730	2990	3250				
										50 km/h	1820	2145	2440	2730	2990	3250				
										65 km/h										
38"	6X11331	520/85R38 155A8/155B TL	530	1863	841	5589	W18L	190	51											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4990	5880	6680	7490	8200	8910				
										10 km/h	3255	3835	4360	4880	5350	5810				
										25 km/h	2410	2840	3225	3610	3960	4300				
										30 km/h	2320	2740	3110	3480	3815	4145				
										40 km/h	2170	2560	2905	3255	3565	3875				
										50 km/h	2170	2560	2905	3255	3565	3875				
										65 km/h										
38"	6X11371	650/85R38 173D/176A8 TL	666	2072	935	6192	DW20B	340	60											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	7185	8490	9635	10780	11760	12740	14530	16330		
										10 km/h	4685	5540	6280	7030	7670	8310	9480	10650		
										25 km/h	3470	4100	4650	5200	5670	6150	7010	7880		
										30 km/h	3340	3950	4480	5010	5470	5925	6760	7600		
										40 km/h	3120	3690	4190	4685	5110	5540	6320	7100		
										50 km/h	2980	3530	4000	4475	4885	5290	6040	6825		
										65 km/h	2840	3360	3810	4260	4650	5040	5750	6500		
42"	6X11311	460/85R42 151A8/151B TL	473	1865	844	5611	W16L	172	50											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	4440	5240	5950	6665	7300	7935				
										10 km/h	2900	3415	3880	4350	4760	5175				
										25 km/h	2145	2530	2870	3220	3520	3830				
										30 km/h	2070	2435	2770	3100	3395	3690				
										40 km/h	1930	2280	2590	2900	3170	3450				
										50 km/h	1930	2280	2590	2900	3170	3450				
										65 km/h										



Farm Specialist TR-II 85 Series

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)			
42"	6X11341	520/85R42 157A8/157B TL	530	1958	875	5884	W18L	201	51			
		<b>Max Load (kg)</b>										
		<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
		Static	5310	6260	7115	7970	8730	9490				
		10 km/h	3465	4080	4640	5200	5690	6190				
		25 km/h	2560	3020	3430	3845	4210	4580				
		30 km/h	2470	2910	3310	3710	4060	4410				
		40 km/h	2310	2720	3090	3465	3795	4125				
		50 km/h	2310	2720	3090	3465	3795	4125				
		65 km/h										
		42"	6X11351	520/85R42 162A8/162B TL	530	1958	875	5884	W18L	213	51	
				<b>Max Load (kg)</b>								
<b>Speed \ Pressure (bar)</b>	<b>0.6</b>			<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
Static	5310			6260	7115	7970	8730	9490	9720	10925		
10 km/h	3465			4080	4640	5200	5690	6190	6340	7125		
25 km/h	2560			3020	3430	3845	4210	4580	4690	5270		
30 km/h	2470			2910	3310	3710	4060	4410	4520	5080		
40 km/h	2310			2720	3090	3465	3795	4125	4230	4750		
50 km/h	2310			2720	3090	3465	3795	4125	4230	4750		
65 km/h												
42"	6X11361			520/85R46 158A8/158B TL	535	2062	921	6205	W18L	220	51	
				<b>Max Load (kg)</b>								
		<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>
		Static	5470	6450	7330	8210	8990	9775				
		10 km/h	3570	4210	4780	5355	5865	6375				
		25 km/h	2640	3110	3540	3960	4340	4720				
		30 km/h	2550	3000	3410	3820	4180	4550				
		40 km/h	2380	2805	3190	3570	3910	4250				
		50 km/h	2380	2805	3190	3570	3910	4250				
		65 km/h										

## FARM SPECIALIST TR - II RC (ROW CROP)

### Versatile Tractor And Sprayer Tire For Row Crop Application

Superior radial construction row crop tire for every kind of cultivation, harvesting and spraying operation. Minimum damage to crops even in narrow spaced plantations. Excellent self-cleaning and improved traction. Overlapping crown and unique lug design with deep tread depth for long tread life and durability.



Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)											
16"	6X11881	210/95R16 106A8/106B TL	215	795	368	2373	W7	23	32											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						1700	1945	2185		
										10 km/h						1110	1270	1425		
										25 km/h						815	930	1045		
										30 km/h						790	905	1020		
										40 km/h						740	845	950		
										50 km/h						740	845	950		
										65 km/h										
18"	6X11891	210/95R18 108A8/108B TL	215	849	393	2542	W7	25,5	32											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						1790	2050	2300		
										10 km/h						1170	1335	1500		
										25 km/h						860	980	1100		
										30 km/h						835	950	1070		
										40 km/h						780	890	1000		
										50 km/h						780	890	1000		
										65 km/h										
20"	6X11901	210/95R20 110A8/110B TL	215	895	413	2686	W7	27,5	32											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static						1900	2170	2440		
										10 km/h						1240	1415	1590		
										25 km/h						910	1040	1165		
										30 km/h						885	1010	1130		
										40 km/h						830	940	1060		
										50 km/h						830	940	1060		
										65 km/h										
30"	6X11251	420/90R30 142A8/142B TL	434	1496	679	4478	DW13	109	48											
										<b>Max Load (kg)</b>										
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2
										Static	3410	4020	4570	5120	5610	6095				
										10 km/h	2225	2620	2980	3340	3660	3975				
										25 km/h	1650	1940	2205	2470	2705	2940				
										30 km/h	1590	1870	2130	2380	2610	2835				
										40 km/h	1480	1750	1990	2225	2440	2650				
										50 km/h	1480	1750	1990	2225	2440	2650				
										65 km/h										

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)							
30"	6X11261	420/90R30 147A8/147B TL	434	1496	679	4478	DW13	115	48							
										<b>Max Load (kg)</b>						
	Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4	
	Static		3410	4020	4570	5120	5610	6095	6295	7070						
	10 km/h		2225	2620	2980	3340	3660	3975	4105	4610						
	25 km/h		1650	1940	2205	2470	2705	2940	3040	3410						
	30 km/h		1590	1870	2130	2380	2610	2835	2930	3290						
	40 km/h		1480	1750	1990	2225	2440	2650	2740	3075						
	50 km/h		1480	1750	1990	2225	2440	2650	2740	3075						
	65 km/h															
	32"	6X12011	230/95R32 128D/131A8 TL	236	1240	585	3742	W7	45	33						
											<b>Max Load (kg)</b>					
		Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
		Static							2420	2740	3050	3360	3635	3910	4140	
10 km/h							1580	1785	1990	2190	2370	2550	2700			
25 km/h							1250	1410	1570	1730	1870	2015	2130			
30 km/h							1210	1370	1525	1680	1820	1955	2070			
40 km/h							1150	1300	1450	1600	1730	1860	1970			
50 km/h							1110	1250	1390	1535	1660	1785	1890			
65 km/h							1050	1190	1325	1460	1580	1700	1800			
32"		6X12071	270/95R32 134D/137A8 TL	284	1319	620	3975	W9	60	35						
											<b>Max Load (kg)</b>					
		Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
		Static							3020	3410	3800	4190	4535	4875		
	10 km/h							1970	2225	2480	2735	2960	3180			
	25 km/h							1560	1760	1960	2160	2335	2510			
	30 km/h							1510	1710	1900	2100	2270	2440			
	40 km/h							1440	1625	1810	1995	2160	2320			
	50 km/h							1380	1560	1735	1910	2070	2225			
	65 km/h							1310	1480	1650	1820	1970	2120			
	32"	6X12081	270/95R32 136D/139A8 TL	284	1319	620	3975	W9	60	35						
											<b>Max Load (kg)</b>					
		Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
		Static							3020	3410	3800	4190	4535	4875	5150	
10 km/h							1970	2225	2480	2735	2960	3180	3360			
25 km/h							1560	1760	1960	2160	2335	2510	2650			
30 km/h							1510	1710	1900	2100	2270	2440	2575			
40 km/h							1440	1625	1810	1995	2160	2320	2450			
50 km/h							1380	1560	1735	1910	2070	2225	2350			
65 km/h							1310	1480	1650	1820	1970	2120	2240			
36"		6X12021	230/95R36 128D/131A8 TL	229	1345	636	4078	W7	50	33						
											<b>Max Load (kg)</b>					
		Speed \ Pressure (bar)		0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
		Static							2570	2900	3230	3560	3850	4140		
	10 km/h							1670	1890	2105	2320	2510	2700			
	25 km/h							1320	1490	1660	1830	1980	2130			
	30 km/h							1280	1450	1615	1780	1925	2070			
	40 km/h							1220	1380	1540	1695	1830	1970			
	50 km/h							1170	1320	1470	1625	1760	1890			
	65 km/h							1115	1260	1400	1550	1670	1800			

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)																									
36"	6X12091	270/95R36 137D/140A8 TL	283	1422	663	4291	W9	66	35	<b>Max Load (kg)</b>																								
										<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4											
										Static						3280	3700	4125	4550	4920	5290													
										10 km/h						2140	2415	2690	2970	3210	3450													
										25 km/h						1690	1910	2125	2340	2535	2725													
										30 km/h						1640	1850	2060	2275	2460	2645													
										40 km/h						1560	1760	1960	2165	2340	2520													
										50 km/h						1500	1690	1880	2080	2245	2415													
										65 km/h						1425	1610	1790	1980	2140	2300													
										38"	6X12101	270/95R38 138D/141D TL	285	1474	691	4450	W9	68	35	<b>Max Load (kg)</b>														
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4	
																				Static						3365	3800	4230	4670	5050	5430			
																				10 km/h						2195	2480	2760	3040	3290	3540			
25 km/h						1730	1960	2180	2405											2600	2800													
30 km/h						1680	1900	2120	2330											2520	2710													
40 km/h						1600	1810	2015	2220											2400	2580													
50 km/h						1535	1735	1930	2130											2305	2480													
65 km/h						1460	1650	1840	2030											2195	2360													
38"	6X12111	270/95R38 140D/143A8 TL	285	1474	691	4450	W9	69	35											<b>Max Load (kg)</b>														
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4	
																				Static						3365	3800	4230	4670	5050	5430	5750		
																				10 km/h						2195	2480	2760	3040	3290	3540	3750		
										25 km/h						1730	1960	2180	2405	2600	2800	2960												
										30 km/h						1680	1900	2120	2330	2520	2710	2875												
										40 km/h						1600	1810	2015	2220	2400	2580	2740												
										50 km/h						1535	1735	1930	2130	2305	2480	2625												
										65 km/h						1460	1650	1840	2030	2195	2360	2500												
										40"	6X12031	230/95R40 135D/138A8 TL	228	1454	662	4395	W7	55	33	<b>Max Load (kg)</b>														
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4	
																				Static						2920	3300	3680	4055	4385	4715	5010		
																				10 km/h						1910	2150	2400	2645	2860	3075	3270		
25 km/h						1505	1700	1895	2090											2260	2430	2580												
30 km/h						1460	1650	1840	2030											2190	2360	2510												
40 km/h						1390	1570	1750	1930											2090	2245	2390												
50 km/h						1335	1510	1680	1850											2000	2150	2290												
65 km/h						1270	1435	1600	1760											1910	2050	2180												
42"	6X12041	230/95R42 133D/136A8 TL	228	1497	684	4527	W7	57	33											<b>Max Load (kg)</b>														
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4	
																				Static						2750	3130	3505	3840	4120	4450	4740		
																				10 km/h						1790	2040	2290	2500	2690	2905	3090		
										25 km/h						1415	1610	1805	1980	2120	2295	2440												
										30 km/h						1370	1560	1750	1920	2060	2230	2370												
										40 km/h						1310	1490	1670	1830	1960	2120	2255												
										50 km/h						1255	1430	1600	1750	1880	2030	2160												
										65 km/h						1195	1360	1520	1670	1790	1935	2060												

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)																								
42"	6X12121	270/95R42 140D/143A8 TL	283	1580	744	4774	W9	74	35																								
										<b>Max Load (kg)</b>																							
										<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>	<b>3.6</b>	<b>4</b>	<b>4.4</b>										
										Static					3565	4025	4485	4945	5350	5750													
										10 km/h					2325	2625	2925	3225	3490	3750													
										25 km/h					1840	2070	2310	2550	2755	2960													
										30 km/h					1780	2010	2240	2470	2670	2875													
										40 km/h					1700	1915	2135	2350	2545	2740													
										50 km/h					1630	1840	2050	2260	2440	2625													
										65 km/h					1550	1750	1950	2150	2325	2500													
										42"	6X12211	320/80R42 141D/144A8 TL	315	1567	730	4771	W10	86	35														
																				<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>	<b>3.6</b>	<b>4</b>	<b>4.4</b>
																				Static					3910	4440	4975	5450	5920				
																				10 km/h					2550	2900	3245	3550	3860				
25 km/h					2010	2290	2560	2810	3050																								
30 km/h					1950	2220	2490	2720	2960																								
40 km/h					1860	2115	2370	2590	2820																								
50 km/h					1780	2030	2270	2490	2700																								
65 km/h					1700	1930	2160	2370	2575																								
44"	6X12051	230/95R44 134D/137A8 TL	229	1547	735	4679	W7	60	33																								
																				<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>	<b>3.6</b>	<b>4</b>	<b>4.4</b>
																				Static					2850	3220	3590	3955	4280	4600	4875		
																				10 km/h					1860	2100	2340	2580	2790	3000	3180		
										25 km/h					1470	1660	1850	2040	2200	2370	2510												
										30 km/h					1425	1610	1790	1980	2140	2300	2440												
										40 km/h					1360	1530	1710	1880	2040	2190	2320												
										50 km/h					1300	1470	1640	1805	1950	2100	2225												
										65 km/h					1240	1400	1560	1720	1860	2000	2120												
										44"	6X12131	270/95R44 142D/145A8 TL	279	1627	768	4917	W9	77	35														
																				<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>	<b>3.6</b>	<b>4</b>	<b>4.4</b>
																				Static					3670	4145	4620	5090	5510	5920	6095		
																				10 km/h					2395	2700	3010	3320	3590	3860	3975		
25 km/h					1890	2135	2380	2620	2840											3050	3140												
30 km/h					1835	2070	2310	2550	2750											2960	3050												
40 km/h					1750	1970	2200	2425	2620											2820	2900												
50 km/h					1675	1890	2110	2325	2510											2700	2780												
65 km/h					1600	1800	2010	2215	2395											2575	2650												
46"	6X12141	270/95R46 143D/146A8 TL	282	1677	798	5066	W9	81	35																								
																				<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	<b>0.6</b>	<b>0.8</b>	<b>1</b>	<b>1.2</b>	<b>1.4</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>	<b>3.6</b>	<b>4</b>	<b>4.4</b>
																				Static					3670	4145	4620	5090	5510	5920	6270		
																				10 km/h					2395	2700	3010	3320	3590	3860	4090		
										25 km/h					1890	2135	2380	2620	2840	3050	3230												
										30 km/h					1835	2070	2310	2550	2750	2960	3130												
										40 km/h					1750	1970	2200	2425	2620	2820	2980												
										50 km/h					1675	1890	2110	2325	2510	2700	2860												
										65 km/h					1600	1800	2010	2215	2395	2575	2725												

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)																								
46"	6X12171	300/95R46 146D/149A8 TL	305	1732	815	5233	W9	87	37	<b>Max Load (kg)</b>																							
										<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4										
										Static						4280	4830	5380	5930	6420	6900												
										10 km/h						2790	3150	3510	3870	4185	4500												
										25 km/h						2200	2490	2770	3060	3305	3555												
										30 km/h						2140	2415	2690	2970	3210	3450												
										40 km/h						2040	2300	2560	2825	3055	3285												
										50 km/h						1950	2205	2460	2710	2930	3150												
										65 km/h						1860	2100	2340	2580	2790	3000												
										46"	6X12181	300/95R46 148D/151A8 TL	305	1732	815	5233	W9	88	37	<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						4280	4830	5380	5930	6420	6900	7245	
10 km/h						2790	3150	3510	3870											4185	4500	4725											
25 km/h						2200	2490	2770	3060											3305	3555	3730											
30 km/h						2140	2415	2690	2970											3210	3450	3620											
40 km/h						2040	2300	2560	2825											3055	3285	3450											
50 km/h						1950	2205	2460	2710											2930	3150	3310											
65 km/h						1860	2100	2340	2580											2790	3000	3150											
46"	6X12221	320/90R46 148D/151A8 TL	315	1737	810	5248	W10	89	37											<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						4280	4830	5380	5930	6900	7245		
										10 km/h						2790	3150	3510	3870	4500	4725												
										25 km/h						2200	2490	2770	3060	3555	3730												
										30 km/h						2140	2415	2690	2970	3450	3620												
										40 km/h						2040	2300	2560	2825	3285	3450												
										50 km/h						1950	2205	2460	2710	3150	3310												
										65 km/h						1860	2100	2340	2580	3000	3150												
										46"	6X12231	340/85R46 150D/153A8 TL	352	1770	835	5345	W11	124	41	<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						4780	5390	6010	6625	7165	7705		
10 km/h						3115	3520	3920	4320											4670	5025												
25 km/h						2460	2780	3095	3410											3690	3970												
30 km/h						2390	2700	3005	3310											3580	3850												
40 km/h						2270	2570	2860	3155											3410	3670												
50 km/h						2180	2460	2740	3025											3270	3520												
65 km/h						2080	2345	2610	2880											3115	3350												
46"	6X11181	380/90R46 149A8/149B TL	391	1868	868	5633	W12	150	47											<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static	3290	3890	4410	4930	5380	5830	6650	7475					
										10 km/h	2145	2535	2875	3220	3510	3800	4340	4875															
										25 km/h	1590	1875	2130	2380	2600	2810	3210	3610															
										30 km/h	1530	1810	2050	2295	2500	2710	3095	3480															
										40 km/h	1430	1690	1920	2145	2340	2535	2890	3250															
										50 km/h	1430	1690	1920	2145	2340	2535	2890	3250															
										65 km/h																							



Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)																								
46"	6X11191	VF 380/90R46 173B/173D TL	395	1868	868	5633	W13	181	47	<b>Max Load (kg)</b>																							
										<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4										
										Static	4635	5380	6280	6880	7625	8220	9420	10465	11360	12410	13155	14050	14950										
										10 km/h	3020	3510	4095	4485	4970	5360	6140	6825	7410	8090	8580	9165	9750										
										25 km/h	2240	2600	3030	3320	3680	3970	4545	5050	5480	5990	6350	6780	7215										
										30 km/h	2155	2500	2920	3200	3550	3825	4380	4870	5285	5770	6120	6540	6955										
										40 km/h	2075	2410	2810	3080	3410	3680	4220	4690	5090	5560	5890	6290	6695										
										50 km/h	2015	2340	2730	2990	3315	3575	4095	4550	4940	5395	5720	6110	6500										
										65 km/h	2015	2340	2730	2990	3315	3575	4095	4550	4940	5395	5720	6110	6500										
										48"	6X12061	230/95R48 136D/139A8 TL	230	1647	780	4984	W7	65	33	<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3020	3410	3800	4190	4535	4875	5150	
																				10 km/h					1970	2225	2480	2735	2960	3180	3360		
																				25 km/h					1560	1760	1960	2160	2335	2510	2650		
30 km/h					1510	1710	1900	2100	2270											2440	2575												
40 km/h					1440	1625	1810	1995	2160											2320	2450												
50 km/h					1380	1560	1735	1910	2070											2225	2350												
65 km/h					1310	1480	1650	1820	1970											2120	2240												
48"	6X12151	270/95R48 142D/145A8 TL	286	1734	821	5243	W9	84	35											<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3780	4270	4750	5240	5670	6095		
																				10 km/h					2465	2780	3100	3420	3700	3975			
																				25 km/h					1950	2200	2450	2700	2920	3140			
										30 km/h					1890	2130	2380	2620	2830	3050													
										40 km/h					1800	2030	2260	2495	2700	2900													
										50 km/h					1725	1950	2170	2390	2590	2780													
										65 km/h					1640	1855	2070	2280	2465	2650													
										48"	6X12161	270/95R48 144D/147A8 TL	286	1734	821	5243	W9	85	35	<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						3780	4270	4750	5240	5670	6095	6440	
																				10 km/h					2465	2780	3100	3420	3700	3975	4200		
																				25 km/h					1950	2200	2450	2700	2920	3140	3320		
30 km/h					1890	2130	2380	2620	2830											3050	3220												
40 km/h					1800	2030	2260	2495	2700											2900	3065												
50 km/h					1725	1950	2170	2390	2590											2780	2940												
65 km/h					1640	1855	2070	2280	2465											2650	2800												
48"	6X12241	340/85R48 152D/155A8 TL	339	1803	850	5463	W11	109	37											<b>Max Load (kg)</b>													
																				<b>Speed \ Pressure (bar)</b>	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
																				Static						4920	5555	6190	6820	7380	7935	8165	
																				10 km/h					3210	3620	4040	4450	4810	5175	5325		
																				25 km/h					2535	2860	3190	3515	3800	4090	4210		
										30 km/h					2460	2780	3095	3410	3690	3970	4080												
										40 km/h					2340	2640	2950	3250	3510	3780	3890												
										50 km/h					2245	2535	2825	3115	3370	3620	3730												
										65 km/h					2140	2415	2690	2970	3210	3450	3550												

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)														
50"	6X11811	320/90R50 150A8/150B TL	305	1828	854	5527	W10	105	36														
										<b>Max Load (kg)</b>													
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
										Static	2680	3190	3620	4060	4420	4780	5430	6470	7090	7245	7705		
										10 km/h	1750	2080	2360	2645	2880	3120	3540	4220	4620	4725	5025		
										25 km/h	1290	1540	1750	1960	2130	2310	2620	3120	3420	3500	3720		
										30 km/h	1250	1480	1685	1890	2055	2225	2530	3010	3300	3370	3585		
										40 km/h	1165	1385	1575	1760	1920	2080	2360	2810	3080	3150	3350		
										50 km/h	1165	1385	1575	1760	1920	2080	2360	2810	3080	3150	3350		
										65 km/h													
52"	6X12191	300/95R52 149D/152A8 TL	305	1889	895	5712	W9	99	37														
										<b>Max Load (kg)</b>													
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
										Static						4635	5230	5830	6430	6950	7475		
										10 km/h						3020	3410	3800	4190	4530	4875		
										25 km/h						2390	2695	3000	3310	3580	3850		
										30 km/h						2320	2615	2915	3210	3475	3740		
										40 km/h						2205	2490	2775	3060	3310	3560		
										50 km/h						2115	2390	2660	2935	3170	3410		
										65 km/h						2015	2275	2535	2795	3020	3250		
52"	6X12201	300/95R52 151D/154A8 TL	305	1889	895	5712	W9	100	37														
										<b>Max Load (kg)</b>													
										Speed \ Pressure (bar)	0.6	0.8	1	1.2	1.4	1.6	2	2.4	2.8	3.2	3.6	4	4.4
										Static						4635	5230	5830	6430	6950	7475	7935	
										10 km/h						3020	3410	3800	4190	4530	4875	5175	
										25 km/h						2390	2695	3000	3310	3580	3850	4090	
										30 km/h						2320	2615	2915	3210	3475	3740	3970	
										40 km/h						2205	2490	2775	3060	3310	3560	3780	
										50 km/h						2115	2390	2660	2935	3170	3410	3620	
										65 km/h						2015	2275	2535	2795	3020	3250	3450	

# FARM SPECIALIST FLOTATION BIAS/ BIAS LIGHT

## Towed Vehicles And Large Implements

The Farm Specialist FB is a tubeless flotation tire made to protect your soil with low compaction. It provides a high load capacity at low inflation pressures, thus preventing damages to fields and crops. It offers enhanced durability due to the strong casing construction and compounds used.

The Farm Specialist FB Light is a tubeless flotation tire offering an alternate tread design and lower weight as compared to the FB. It provides a high load capacity at low inflation pressures, thus preventing damages to fields and crops.



Rim Ø	Item number	Description	Star /PR	Section Width [mm]	Overall Dia- meter [mm]	Recom. Rim Width [inch]	LI/SI		Inflation Pressure Bar	Max Load [kg]								Weight [kg]	Tread depth [mm]
							Free Rolling	Drive Wheel		Free Rolling				Drive Wheel					
										10 [km/h]	25 [km/h]	40 [km/h]	50 [km/h]	10 [km/h]	25 [km/h]	40 [km/h]	50 [km/h]		
15.5"	6X10191	400/60-15.5 145A8 TL Farm Specialist FB	14	405	875	13	145A8	132A8	3.6	4060	3450	2900	2610	2800	2380	2000	1800	35.5	16
22.5"	6X10231	500/60-22.5 163A8 TL Farm Specialist FB	16	510	1180	16	163A8	151A8	3.2	6830	5800	4875	4390	4830	4110	3450	3110	90.5	25.5
	6X10221	500/60-22.5 163A8 TL Farm Specialist FB Light	16	476	1170	16	163A8	151A8	3.2	6830	5800	4875	4390	4830	4110	3450	3110	86	20
	6X10261	550/60-22.5 166A8 TL Farm Specialist FB	16	550	1238	16 DC	167A8	154A8	3	7630	6490	5450	4910	5250	4460	3750	3380	108.5	20
	6X10251	550/60-22.5 166A8 TL Farm Specialist FB Light	16	550	1238	16 DC	167A8	154A8	2.8	7630	6490	5450	4910	5250	4460	3750	3380	94.5	20
	6X10271	560/45-22.5 160A8 TL Farm Specialist FB	16	543	1076	16	160A8	148A8	3.2	6300	5360	4500	4050	4410	3750	3150	2840	79.5	25
	6X10301	600/50-22.5 165A8 TL Farm Specialist FB	16	610	1180	20	165A8	153A8	2.6	7210	6130	5150	4640	5110	4340	3650	3290	105	25.5
	6X10291	600/50-22.5 165A8 TL Farm Specialist FB Light	16	576	1170	20	165A8	153A8	2.6	7210	6130	5150	4640	5110	4340	3650	3290	97	20
	6X10311	600/55-22.5 169A8 TL Farm Specialist FB	16	600	1235	20	169A8	156A8	2.6	8120	6900	5800	5220	5600	4760	4000	3600	108	20
	6X10341	700/40-22.5 166A8 TL Farm Specialist FB	16	710	1180	24	166A8	154A8	2.6	7420	6310	5300	4770	5250	4460	3750	3380	120	25.5
	6X10321	700/40-22.5 166A8 TL Farm Specialist FB Light	16	676	1170	24	166A8	154A8	2.6	7420	6310	5300	4770	5250	4460	3750	3380	112.5	20
6X10331	700/40-22.5 168A8 TL Farm Specialist FB Light	18	676	1170	24	168A8	156A8	3.4	7840	6660	5600	5040	5600	4750	4000	3600	116	20	
6X10351	700/50-22.5 174A8 TL Farm Specialist FB	16	700	1270	24	174A8	162A8	2.8	9380	7970	6700	6030	6650	5650	4750	4280	124.5	20	
26.5"	6X10361	600/55-26.5 170A8 TL Farm Specialist FB	16	591	1333	20	170A8	159A8	2.6	8400	7140	6000	5400	6130	5210	4375	3940	130	25
	6X10381	700/50-26.5 174A8 TL Farm Specialist FB	16	700	1333	24	174A8	162A8	2.4	9380	7970	6700	6030	6650	5650	4750	4280	148	25
	6X10391	800/45-26.5 177A8 TL Farm Specialist FB	16	800	1333	28	177A8	164A8	2.2	10220	8690	7300	6570	7000	5950	5000	4500	156	25
30.5"	6X10421	750/60-30.5 182A8 TL Farm Specialist FB	16	750	1670	24	182A8	170A8	2.2	11900	10120	8500	7650	8400	7140	6000	5400	221.5	25.4
	6X10411	850/50-30.5 186A8 TL Farm Specialist FB	16	850	1670	28	186A8	174A8	2.2	13300	11310	9500	8550	9380	7970	6700	6030	241	25.4

# FARM SPECIALIST FLOTATION RADIAL

## Heavy Duty Flotation Applications

A flotation and transport tire mainly designed for field use including spreaders, trailers and implements. Wide profile results in an extended contact area to reduce soil compaction and increase crop yield. Product life also elongated by reinforced tread and flank protection.




FR-Trac


FR-G / FR-G Steel

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	------------------------	-------------------------	----------------------------	------------------	------------------	------------------


### Farm Specialist FR Trac

17"	6X10111	500/50R17 145D TL	497	925	412	2780	16.00	52,5	15	
<b>Max Load (kg)</b>										
	Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
	Static	2935	3270	3870	4400	4935	5400	5800	6270	6670
	10 km/h	2300	2560	3030	3445	3860	4230	4540	4910	5220
	25 km/h	2015	2245	2660	3020	3390	3710	3985	4310	4580
	30 km/h	1930	2145	2540	2890	3240	3550	3810	4115	4380
	40 km/h	1735	1930	2290	2600	2920	3195	3430	3710	3940
	50 km/h	1540	1720	2035	2315	2600	2840	3050	3300	3510
	60 km/h	1365	1520	1800	2050	2295	2510	2700	2920	3100
65 km/h	1275	1420	1680	1910	2145	2350	2520	2725	2900	

### Farm Specialist FR Trac


22.5"	6X10121	500/60R22.5 155D TL	483	1186	537	3558	16.00	84,5	26	
<b>Max Load (kg)</b>										
	Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
	Static	3920	4370	5170	5880	6595	7220	7750	8380	8910
	10 km/h	3070	3420	4045	4600	5160	5650	6070	6560	6975
	25 km/h	2690	3000	3550	4040	4530	4960	5330	5755	6120
	30 km/h	2575	2870	3390	3860	4330	4740	5090	5500	5850
	40 km/h	2320	2580	3060	3480	3900	4270	4585	4950	5270
	50 km/h	2060	2300	2720	3095	3470	3800	4080	4410	4690
	60 km/h	1820	2030	2405	2740	3070	3360	3610	3900	4145
65 km/h	1705	1900	2250	2560	2870	3140	3370	3640	3875	

### Farm Specialist FR-G


22.5"	6X09911	500/60R22.5 155D TL	506	1170	528	3509	16.00	93	25	
<b>Max Load (kg)</b>										
	Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
	Static	3920	4370	5170	5880	6595	7220	7750	8380	8910
	10 km/h	3070	3420	4045	4600	5160	5650	6070	6560	6975
	25 km/h	2690	3000	3550	4040	4530	4960	5330	5755	6120
	30 km/h	2575	2870	3390	3860	4330	4740	5090	5500	5850
	40 km/h	2320	2580	3060	3480	3900	4270	4585	4950	5270
	50 km/h	2060	2300	2720	3095	3470	3800	4080	4410	4690
	60 km/h	1820	2030	2405	2740	3070	3360	3610	3900	4145
65 km/h	1705	1900	2250	2560	2870	3140	3370	3640	3875	

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	------------------------	-------------------------	----------------------------	------------------	------------------	------------------


### Farm Specialist FR Trac

	22.5"	<b>6X10131</b>	560/45R22.5 152D TL	523	1085	486	3266	16.00	85	25
	<b>Max Load (kg)</b>									
	<b>Speed \ Pressure (bar)</b>	<b>1</b>	<b>1.2</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>	<b>3.6</b>	<b>4</b>
	Static	3590	4000	4735	5390	6040	6610	7100	7675	8165
	10 km/h	2810	3130	3705	4220	4730	5175	5560	6010	6390
	25 km/h	2470	2750	3250	3700	4150	4540	4880	5270	5610
	30 km/h	2360	2630	3110	3540	3970	4340	4660	5040	5360
	40 km/h	2120	2365	2800	3185	3570	3910	4200	4540	4830
	50 km/h	1890	2105	2490	2835	3180	3480	3740	4040	4295
	60 km/h	1670	1860	2200	2510	2810	3080	3305	3570	3800
65 km/h	1560	1740	2060	2340	2630	2875	3090	3340	3550	


### Farm Specialist FR-G

	22.5"	<b>6X09921</b>	560/45R22.5 152D TL	538	1072	480	3220	16.00	88,5	25
	<b>Max Load (kg)</b>									
	<b>Speed \ Pressure (bar)</b>	<b>1</b>	<b>1.2</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>	<b>3.6</b>	<b>4</b>
	Static	3590	4000	4735	5390	6040	6610	7100	7675	8165
	10 km/h	2810	3130	3705	4220	4730	5175	5560	6010	6390
	25 km/h	2470	2750	3250	3700	4150	4540	4880	5270	5610
	30 km/h	2360	2630	3110	3540	3970	4340	4660	5040	5360
	40 km/h	2120	2365	2800	3185	3570	3910	4200	4540	4830
	50 km/h	1890	2105	2490	2835	3180	3480	3740	4040	4295
	60 km/h	1670	1860	2200	2510	2810	3080	3305	3570	3800
65 km/h	1560	1740	2060	2340	2630	2875	3090	3340	3550	

### Farm Specialist FR Trac

	22.5"	<b>6X10141</b>	560/60R22.5 161D TL	522	1277	570	3837	16.00	89,5	20
	<b>Max Load (kg)</b>									
	<b>Speed \ Pressure (bar)</b>	<b>1</b>	<b>1.2</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>	<b>3.6</b>	<b>4</b>
	Static	4680	5210	6170	7020	7870	8615	9255	10000	10640
	10 km/h	3660	4080	4830	5495	6160	6740	7240	7825	8325
	25 km/h	3215	3580	4240	4820	5410	5920	6360	6870	7310
	30 km/h	3070	3420	4050	4610	5170	5660	6075	6565	6980
	40 km/h	2770	3080	3650	4150	4655	5095	5470	5910	6290
	50 km/h	2460	2740	3245	3690	4140	4530	4870	5260	5595
	60 km/h	2180	2425	2870	3265	3660	4010	4305	4650	4950
65 km/h	2035	2265	2680	3050	3420	3745	4020	4350	4625	

### Farm Specialist FR-G

	22.5"	<b>6X09931</b>	560/60R22.5 161D TL	562	1256	559	3767	16.00	109	25
	<b>Max Load (kg)</b>									
	<b>Speed \ Pressure (bar)</b>	<b>1</b>	<b>1.2</b>	<b>1.6</b>	<b>2</b>	<b>2.4</b>	<b>2.8</b>	<b>3.2</b>	<b>3.6</b>	<b>4</b>
	Static	4680	5210	6170	7020	7870	8615	9255	10000	10640
	10 km/h	3660	4080	4830	5495	6160	6740	7240	7825	8325
	25 km/h	3215	3580	4240	4820	5410	5920	6360	6870	7310
	30 km/h	3070	3420	4050	4610	5170	5660	6075	6565	6980
	40 km/h	2770	3080	3650	4150	4655	5095	5470	5910	6290
	50 km/h	2460	2740	3245	3690	4140	4530	4870	5260	5595
	60 km/h	2180	2425	2870	3265	3660	4010	4305	4650	4950
65 km/h	2035	2265	2680	3050	3420	3745	4020	4350	4625	

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	------------------------	-------------------------	----------------------------	------------------	------------------	------------------

### Farm Specialist FR-G Steel

22.5"	6X09941	560/60R22.5 164D TL	562	1256	559	3767	16.00	113	25
-------	---------	---------------------	-----	------	-----	------	-------	-----	----



Max Load (kg)										
Speed \ Pressure (bar)	1	1.2	1.5	1.6	2	2.4	2.8	3.2	3.6	4
Static	5060	5635	6440	6670	7590	8510	9315	10005	10810	11500
10 km/h	3960	4410	5040	5220	5940	6660	7290	7830	8460	9000
25 km/h	3475	3870	4420	4580	5210	5845	6400	6870	7425	7900
30 km/h	3320	3700	4230	4380	4980	5590	6115	6570	7100	7550
40 km/h	2990	3330	3810	3940	4490	5030	5510	5915	6390	6800
50 km/h	2660	2965	3390	3510	3990	4480	4900	5260	5690	6050
60 km/h	2350	2620	2995	3100	3530	3960	4330	4655	5030	5350
65 km/h	2200	2450	2800	2900	3300	3700	4050	4350	4700	5000

### Farm Specialist FR Trac

22.5"	6X10151	600/50R22.5 159D TL	580	1185	536	3556	20.00	103,5	26
-------	---------	---------------------	-----	------	-----	------	-------	-------	----



Max Load (kg)										
Speed \ Pressure (bar)	1	1.2	1.5	1.6	2	2.4	2.8	3.2	3.6	4
Static	4430	4930	5485	5835	6640	7445	8150	8750	9460	10060
10 km/h	3465	3860	4290	4570	5200	5830	6380	6850	7400	7875
25 km/h	3040	3390	3770	4010	4560	5115	5600	6010	6500	6910
30 km/h	2910	3240	3600	3830	4360	4890	5350	5750	6210	6605
40 km/h	2620	2915	3240	3450	3930	4400	4820	5180	5590	5950
50 km/h	2330	2590	2885	3070	3490	3920	4290	4605	4975	5290
60 km/h	2060	2290	2550	2715	3090	3460	3790	4070	4400	4680
65 km/h	1925	2140	2385	2540	2890	3240	3540	3805	4110	4375

### Farm Specialist FR-G

22.5"	6X09951	600/50R22.5 159D TL	608	1168	522	3507	20.00	104	25
-------	---------	---------------------	-----	------	-----	------	-------	-----	----



Max Load (kg)										
Speed \ Pressure (bar)	1	1.2	1.5	1.6	2	2.4	2.8	3.2	3.6	4
Static	4430	4930	5635	5835	6640	7445	8150	8750	9460	10060
10 km/h	3465	3860	4410	4570	5200	5830	6380	6850	7400	7875
25 km/h	3040	3390	3870	4010	4560	5115	5600	6010	6500	6910
30 km/h	2910	3240	3700	3830	4360	4890	5350	5750	6210	6605
40 km/h	2620	2915	3330	3450	3930	4400	4820	5180	5590	5950
50 km/h	2330	2590	2965	3070	3490	3920	4290	4605	4975	5290
60 km/h	2060	2290	2620	2715	3090	3460	3790	4070	4400	4680
65 km/h	1925	2140	2450	2540	2890	3240	3540	3805	4110	4375

### Farm Specialist FR-G

22.5"	6X09961	600/55R22.5 162D TL	610	1214	537	3643	20.00	121,5	25
-------	---------	---------------------	-----	------	-----	------	-------	-------	----



Max Load (kg)										
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	
Static	4810	5350	6340	7210	8085	8850	9505	10270	10925	
10 km/h	3760	4190	4960	5640	6330	6925	7440	8040	8550	
25 km/h	3300	3680	4350	4950	5550	6080	6530	7055	7505	
30 km/h	3155	3515	4160	4730	5310	5810	6240	6740	7170	
40 km/h	2840	3165	3750	4260	4780	5230	5620	6070	6460	
50 km/h	2530	2815	3330	3790	4250	4655	5000	5400	5750	
60 km/h	2235	2490	2950	3350	3760	4120	4420	4780	5080	
65 km/h	2090	2330	2755	3135	3515	3850	4130	4465	4750	



Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	------------------------	-------------------------	----------------------------	------------------	------------------	------------------

### Farm Specialist FR-G

22.5"	6X09971	650/50R22.5 163D TL	654	1208	532	3619	20.00	127,5	25
-------	---------	---------------------	-----	------	-----	------	-------	-------	----



#### Max Load (kg)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	4
Static	4930	5490	6500	7400	8300	9080	9755	10540	11210	
10 km/h	3860	4300	5090	5790	6490	7110	7630	8250	8775	
25 km/h	3390	3770	4470	5080	5700	6240	6700	7240	7700	
30 km/h	3240	3610	4270	4860	5450	5960	6400	6920	7360	
40 km/h	2920	3250	3845	4375	4905	5370	5770	6230	6630	
50 km/h	2595	2890	3420	3890	4365	4780	5130	5545	5900	
60 km/h	2295	2555	3025	3440	3860	4225	4540	4900	5215	
65 km/h	2145	2390	2830	3220	3610	3950	4240	4580	4875	

### Farm Specialist FR Trac

22.5"	6X10161	710/45R22.5 165D TL	678	1189	530	3567	24.00	117,5	26
-------	---------	---------------------	-----	------	-----	------	-------	-------	----



#### Max Load (kg)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5210	5800	6870	7820	8765	9590	10305	11130	11845
10 km/h	4080	4540	5380	6120	6860	7510	8065	8710	9270
25 km/h	3580	3990	4720	5370	6020	6590	7080	7650	8140
30 km/h	3420	3810	4510	5130	5755	6300	6765	7310	7780
40 km/h	3080	3430	4060	4620	5180	5670	6090	6580	7000
50 km/h	2740	3050	3610	4110	4610	5050	5420	5860	6230
60 km/h	2425	2700	3195	3640	4080	4460	4790	5180	5510
65 km/h	2265	2520	2990	3400	3810	4170	4480	4840	5150

### Farm Specialist FR-G

22.5"	6X09981	710/45R22.5 165D TL	710	1189	530	3567	24.00	137,5	25
-------	---------	---------------------	-----	------	-----	------	-------	-------	----



#### Max Load (kg)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5210	5800	6870	7820	8765	9590	10305	11130	11845
10 km/h	4080	4540	5380	6120	6860	7510	8065	8710	9270
25 km/h	3580	3990	4720	5370	6020	6590	7080	7650	8140
30 km/h	3420	3810	4510	5130	5755	6300	6765	7310	7780
40 km/h	3080	3430	4060	4620	5180	5670	6090	6580	7000
50 km/h	2740	3050	3610	4110	4610	5050	5420	5860	6230
60 km/h	2425	2700	3195	3640	4080	4460	4790	5180	5510
65 km/h	2265	2520	2990	3400	3810	4170	4480	4840	5150

### Farm Specialist FR trac

26.5"	6X10171	600/55R26.5 165D TL	587	1361	608	4046	20.00	123	26
-------	---------	---------------------	-----	------	-----	------	-------	-----	----



#### Max Load (kg)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5210	5800	6870	7820	8765	9590	10305	11130	11845
10 km/h	4080	4540	5380	6120	6860	7510	8065	8710	9270
25 km/h	3580	3990	4720	5370	6020	6590	7080	7650	8140
30 km/h	3420	3810	4510	5130	5755	6300	6765	7310	7780
40 km/h	3080	3430	4060	4620	5180	5670	6090	6580	7000
50 km/h	2740	3050	3610	4110	4610	5050	5420	5860	6230
60 km/h	2425	2700	3195	3640	4080	4460	4790	5180	5510
65 km/h	2265	2520	2990	3400	3810	4170	4480	4840	5150

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom.Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	------------------------	-------------------------	----------------------------	-----------------	------------------	------------------

### Farm Specialist FR-G

26.5"	6X09991	600/55R26.5 165D TL	610	1320	586	3966	20.00	135	25
-------	---------	---------------------	-----	------	-----	------	-------	-----	----



Max Load (kg)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5210	5800	6870	7820	8765	9590	10305	11130	11845
10 km/h	4080	4540	5380	6120	6860	7510	8065	8710	9270
25 km/h	3580	3990	4720	5370	6020	6590	7080	7650	8140
30 km/h	3420	3810	4510	5130	5755	6300	6765	7310	7780
40 km/h	3080	3430	4060	4620	5180	5670	6090	6580	7000
50 km/h	2740	3050	3610	4110	4610	5050	5420	5860	6230
60 km/h	2425	2700	3195	3640	4080	4460	4790	5180	5510
65 km/h	2265	2520	2990	3400	3810	4170	4480	4840	5150

### Farm Specialist FR-G

26.5"	6X10001	620/55R26.5 166D TL	641	1378	618	4142	20.00	137,5	25
-------	---------	---------------------	-----	------	-----	------	-------	-------	----



Max Load (kg)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5360	5970	7070	8045	9020	9870	10605	11460	12190
10 km/h	4200	4675	5530	6295	7060	7730	8300	8970	9540
25 km/h	3685	4100	4860	5530	6200	6780	7285	7870	8370
30 km/h	3520	3920	4640	5280	5920	6480	6960	7520	8000
40 km/h	3170	3530	4180	4760	5330	5840	6270	6775	7210
50 km/h	2820	3140	3720	4230	4745	5195	5580	6030	6410
60 km/h	2495	2780	3290	3740	4200	4590	4930	5330	5670
65 km/h	2330	2600	3070	3500	3920	4290	4610	4980	5300

### Farm Specialist FR-G

26.5"	6X10011	650/55R26.5 169D TL	650	1396	625	4196	20.00	151	25
-------	---------	---------------------	-----	------	-----	------	-------	-----	----



Max Load (kg)									
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	5870	6540	7740	8800	9870	10805	11605	12540	13340
10 km/h	4590	5115	6055	6890	7725	8455	9080	9810	10440
25 km/h	4030	4490	5315	6050	6780	7420	7970	8610	9160
30 km/h	3850	4290	5080	5780	6480	7090	7620	8230	8760
40 km/h	3470	3865	4575	5205	5840	6390	6860	7415	7890
50 km/h	3090	3440	4070	4630	5190	5685	6105	6600	7020
60 km/h	2730	3040	3600	4095	4590	5030	5400	5830	6205
65 km/h	2550	2840	3360	3830	4290	4700	5045	5450	5800

### Farm Specialist FR-G Steel

26.5"	6X10021	650/55R26.5 178D TL	650	1396	625	4196	20.00	182	25
-------	---------	---------------------	-----	------	-----	------	-------	-----	----



Max Load (kg)										
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	5
Static	6730	7420	8800	10005	11210	12250	13280	14145	15010	17250
10 km/h	5265	5805	6885	7830	8775	9585	10395	11070	11745	13500
25 km/h	4620	5095	6040	6870	7700	8410	9125	9720	10310	11850
30 km/h	4420	4870	5775	6570	7360	8040	8720	9290	9850	11325
40 km/h	3980	4385	5200	5915	6630	7240	7850	8360	8870	10200
50 km/h	3540	3900	4630	5260	5900	6440	6990	7440	7895	9075
60 km/h	3130	3450	4090	4655	5215	5700	6180	6580	6980	8025
65 km/h	2925	3225	3825	4350	4875	5325	5775	6150	6525	7500

Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom.Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	------------------------	-------------------------	----------------------------	-----------------	------------------	------------------

### Farm Specialist FR Trac

26.5"	6X10181	710/50R26.5 170D TL	678	1342	596	4034	24.00	142,5	26	
<b>Max Load (kg)</b>										
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	
Static	6070	6760	8000	9110	10210	11180	12005	12970	13800	
10 km/h	4750	5290	6260	7130	7990	8750	9395	10150	10800	
25 km/h	4170	4645	5500	6260	7015	7680	8250	8910	9480	
30 km/h	3985	4440	5255	5980	6700	7340	7880	8515	9060	
40 km/h	3590	4000	4730	5385	6040	6610	7100	7670	8160	
50 km/h	3190	3560	4210	4790	5370	5880	6315	6820	7260	
60 km/h	2825	3145	3720	4240	4750	5200	5585	6035	6420	
65 km/h	2640	2940	3480	3960	4440	4860	5220	5640	6000	



### Farm Specialist FR-G Steel

26.5"	6X10031	710/50R26.5 170D TL	728	1368	613	4113	24.00	176,5	25	
<b>Max Load (kg)</b>										
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	
Static	6070	6760	8000	9110	10210	11180	12005	12970	13800	
10 km/h	4750	5290	6260	7130	7990	8750	9395	10150	10800	
25 km/h	4170	4645	5500	6260	7015	7680	8250	8910	9480	
30 km/h	3985	4440	5255	5980	6700	7340	7880	8515	9060	
40 km/h	3590	4000	4730	5385	6040	6610	7100	7670	8160	
50 km/h	3190	3560	4210	4790	5370	5880	6315	6820	7260	
60 km/h	2825	3145	3720	4240	4750	5200	5585	6035	6420	
65 km/h	2640	2940	3480	3960	4440	4860	5220	5640	6000	



### Farm Specialist FR-G

26.5"	6X10041	750/45R26.5 170D TL	751	1345	594	4044	24.00	162,5	25	
<b>Max Load (kg)</b>										
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	
Static	6070	6760	8000	9110	10210	11180	12005	12970	13800	
10 km/h	4750	5290	6260	7130	7990	8750	9395	10150	10800	
25 km/h	4170	4645	5500	6260	7015	7680	8250	8910	9480	
30 km/h	3985	4440	5255	5980	6700	7340	7880	8515	9060	
40 km/h	3590	4000	4730	5385	6040	6610	7100	7670	8160	
50 km/h	3190	3560	4210	4790	5370	5880	6315	6820	7260	
60 km/h	2825	3145	3720	4240	4750	5200	5585	6035	6420	
65 km/h	2640	2940	3480	3960	4440	4860	5220	5640	6000	



### Farm Specialist FR-G Steel

30.5"	6X10061	600/60R30.5 173D TL	624	1487	673	4477	20.00	188	25	
<b>Max Load (kg)</b>										
Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	
Static	6580	7325	8670	9870	11060	12110	13010	14050	14950	
10 km/h	5150	5730	6785	7720	8660	9480	10180	11000	11700	
25 km/h	4520	5030	5960	6780	7600	8320	8935	9650	10270	
30 km/h	4320	4810	5690	6480	7260	7950	8540	9225	9815	
40 km/h	3890	4330	5130	5830	6540	7160	7690	8310	8840	
50 km/h	3460	3850	4560	5190	5820	6370	6840	7390	7865	
60 km/h	3060	3410	4030	4590	5150	5630	6050	6540	6955	
65 km/h	2860	3185	3770	4290	4810	5265	5655	6110	6500	



Rim Ø	Item number	Description	Section Width (mm)	Outsider Diameter (mm)	Static Load Radius (mm)	Rolling Circumference (mm)	Recom. Rim Width	Tire Weight (kg)	Tread Depth (mm)
-------	-------------	-------------	--------------------	------------------------	-------------------------	----------------------------	------------------	------------------	------------------

### Farm Specialist FR-G Steel

30.5"	6X10071	600/60R30.5 179D TL	624	1487	673	4477	20.00	202	25
-------	---------	---------------------	-----	------	-----	------	-------	-----	----



#### Max Load (kg)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	4.5	5
Static	6950	7665	9090	10340	11585	12655	13725	14620	15510	16755	17825
10 km/h	5440	6000	7115	8090	9070	9905	10740	11440	12140	13110	13950
25 km/h	4775	5265	6245	7100	7960	8690	9430	10040	10650	11510	12245
30 km/h	4560	5030	5970	6790	7610	8310	9010	9595	10180	11000	11700
40 km/h	4110	4530	5375	6110	6850	7480	8115	8640	9170	9910	10540
50 km/h	3660	4030	4780	5440	6095	6660	7220	7690	8160	8815	9380
60 km/h	3230	3565	4230	4810	5390	5890	6385	6800	7210	7795	8290
65 km/h	3020	3330	3950	4495	5040	5500	5970	6355	6740	7285	7750

### Farm Specialist FR-G Steel

30.5"	6X10081	750/60R30.5 181D TL	767	1658	735	4986	24.00	234	25
-------	---------	---------------------	-----	------	-----	------	-------	-----	----



#### Max Load (kg)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	8350	9300	11005	12520	14040	15370	16510	17840	18975
10 km/h	6530	7280	8610	9800	10990	12030	12920	13960	14850
25 km/h	5735	6390	7560	8600	9645	10560	11340	12250	13035
30 km/h	5480	6100	7225	8220	9220	10090	10840	11710	12460
40 km/h	4940	5500	6510	7405	8300	9090	9760	10550	11220
50 km/h	4390	4890	5790	6590	7390	8085	8685	9380	9980
60 km/h	3880	4325	5120	5825	6530	7150	7680	8300	8830
65 km/h	3630	4040	4785	5445	6105	6680	7180	7755	8250

### Farm Specialist FR-G Steel

30.5"	6X10091	850/50R30.5 182D TL	882	1652	719	4925	28.00	249	25
-------	---------	---------------------	-----	------	-----	------	-------	-----	----



#### Max Load (kg)

Speed \ Pressure (bar)	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4
Static	8600	9580	11340	12900	14470	15835	17010	18380	19550
10 km/h	6730	7500	8870	10100	11320	12390	13310	14380	15300
25 km/h	5910	6580	7790	8860	9940	10880	11680	12620	13430
30 km/h	5650	6290	7440	8470	9500	10395	11165	12065	12835
40 km/h	5085	5660	6705	7630	8550	9360	10060	10865	11560
50 km/h	4525	5040	5965	6790	7610	8330	8950	9670	10285
60 km/h	4000	4460	5275	6000	6730	7370	7910	8550	9095
65 km/h	3740	4165	4930	5610	6290	6885	7395	7990	8500

## MULTI TRAC C/S R3

### Wagons, Balers, Spreaders, Seeders & Feed Yard Mixers

With its squared lugs and wide base for stability, the Multi Trac C/S R-3 is excellent for minimal ground disturbance for turf and mowing applications. Made in the USA.




Item Number	Size	Star/PLY	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (Kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
560454	29x12.50-15 NHS	6	99 A8	741.7	309.9	775	40	2.1	16.33	US	5999110824703
6E0580	375/70-15	4	123 A4	901.7	373.4	1550	20	1.4	26.68	US	5999110800257
570083	41x14.00B20	4	120 B	1066.8	374.7	1400	50	1.8	46.95	US	5999110802428
560361	36x14.00-15 NHS	4	114 B	914.4	355.6	1180	50	1.4	26.76	US	5999110825120
6A0376	44x18-20	4	123 B	1155.7	457.2	1550	50	1.4	61.7	US	5999110800196
6A0375	44x18-20 NHS	6	131 B	1137.9	469.9	1950	50	2.1	61.67	US	5999110802435

## TURF PRO R-3

### General Turf, Maintenance And Mowing Application

Flotation tread designed for mowing and turf applications, the Carlisle branded R-3 series is engineered with shallow non-skid depth with isolated tread elements that create minimal ground disturbance for a turf-friendly result. Made in the USA.

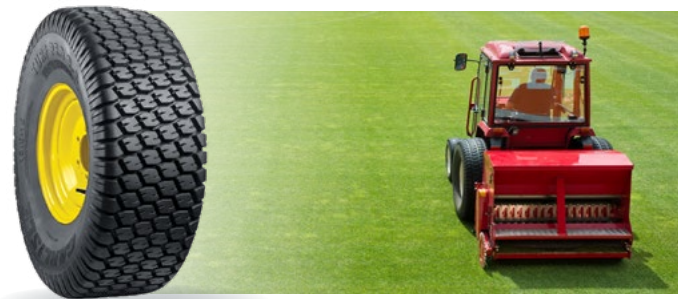

Item Number	Size	Star/PLY	LI/SI	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (Kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Weight (kg)	CoO	EAN
5116021	12X5.00-4	2	38 A3	293	115	133	16	1.5	1.76	CN	5999110804255
5E0589	360/55-15	8	116 B	770	361	1252	49	3.1	26.5	US	5999110800530
570084	9.50-24	6	102 A8	1024	242	849	25	2.1	25.72	US	5999110804262
5E0085	310/75-24		105 A8	1077	315	948	41	1.8	37.2	US	5999110825106
5E0080	400/70-16	4	96 A8	978	398	713	41	1	38.06	US	5999110800547

## FSE FLOTATION IMP

### Trailer, implement and transport application

Modern implement tire with dual bead and reinforced sidewall for extra load carrying capacity. Provide excellent high flotation and trailers application.



Item number	Size	PR	LI/SI	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread Depth (mm)	Weight (Kg)	Coo	EAN
6X15203	400/60-15.5	14	151A6/148A8	TL	AG13	874	404	3450	30	4.4	20	34.2	IND	5999110833347
6X17043	500/50-17	14	155A6/151A8	TL	16	960	490	3875	30	3.4	20	51.0	IND	5999110834993

## FSE-AW

### Trailer, implement and transport application

Up to date implement tire with high load capacity and minimum soil compaction character. Can be used for road and off-road applications.



Item number	Size	PR	LI/SI	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread Depth (mm)	Weight (Kg)	Coo	EAN
6X15163	10.0/75-15.3	14	136A6/132A8	TL	9	760	264	2240	30	6.6	10	15.2	IND	5999110833309
6X17003	10.0/75-15.3	22	148A6/144A8	TL	9	760	264	3150	30	8.5	10	20.4	IND	5999110835334
6X15173	11.5/80-15.3	14	145A6/141A8	TL	9	845	290	2900	30	5.7	12	19.1	IND	5999110833316
6X15183	12.5/80-15.3	14	148A6/144A8	TL	9	889	307	3150	30	5.2	11.5	24	IND	5999110833323
6X15193	400/60-15.5	14	151A6/148A8	TL	AG13	874	404	3450	30	4.4	20	33	IND	5999110833330
6X15213	13.0/75-16	10	142A6/138A8	TL	11 9. W9. W11	900	336	2650	30	3.6	12	27.5	IND	5999110833354
6X15253*	15.0/55-17	12	144A6/140A8	TL	13	850	391	2800	30	3.7	10	25.1	IND	5999110833361
6X15223*	480/45-17 (19.0/45-17)	14	150A6/146A8	TL	16	852	491	3350	30	3.4	12	40.8	IND	5999110833378
6X15233*	500/50-17	14	155A6/151A8	TL	16	965	495	3875	30	3.4	12	50.8	IND	5999110833385
6X15243*	500/50-17	18	160A6/156A8	TL	16	965	495	4500	30	5.0	12	52.5	IND	5999110833392
6X15263	13.0/65-18	16	150A6/146A8	TL	11	890	336	3350	30	5.9	11	29	IND	5999110833408

## FSE TF DRP

### Tractor Front Tire

2WD tractor front tires, good on road application and field application with excellent steering control ability.



Rim Ø (inch)	Product code	Size	TL/TT	PLY RATING	LI/SI	Rated Load (kg)	Rated speed (km/h)	Inflation Pressure (bar)	Monted Diameter (mm)	Mounted Width (mm)	Rim width (inch)	Weight (kg)	Tread Depth (mm)	Origin	EAN
16	6X15363	6.50-16	TT	8	98A6/90A8	750	30	4.2	760	175	4.5E	12.3	17	IND	5999110833415
	6X15373	7.50-16	TT	6	98A6/90A8	750	30	2.8	805	205	5.5F	15	20	IND	5999110833422
20	6X15383	6.50-20	TT	10	107A6/100A8	975	30	5	864	180	5.00F	16.3	18	IND	5999110833439



## FARM SPECIALIST HYDRO-PRO D

### Pivot Irrigation Systems

The Farm Specialist Hydro-Pro D is specifically designed for protecting crops and minimizing soil damage. The special nylon carcass minimizes mechanical failure and moisture deterioration. The angled tread lugs provide maximum traction while reducing crop damage to increase yield.



SKU	Size	Ply rating	LI/SI	Monted Diameter [mm]	Mounted Width [mm]	Static Loaded Radius [mm]	Rolling Circumference [mm]	Max Load (kg)	Rated speed (km/h)	Inflation Pressure [bar]	Weight (kg)	Tread Depth [mm]	EAN
6X10513	11.2-24 Tubeless	6	110A6	1090	284	515.1	3199.9	1060	30	1.8	34.5	25.4	5999110828268
6X10503	11.2-24 TT	6	110A6	1090	284	515.1	3199.9	1060	30	1.8	32	25.4	5999110828251
6X10523	11.2-24 TT	8	116A6	1090	284	515.1	3199.9	1250	30	2.4	32	25.4	5999110828275
6X10483	14.9-24 Tubeless	6	123A6	1245	381	584.2	3657.6	1550	30	1.4	51	28	5999110828237
6X10473	14.9-24 TT	6	123A6	1245	381	584.2	3657.6	1700	30	1.8	48.7	28	5999110828220
6X10493	14.9-24 TT	8	128A6	1245	381	584.2	3657.6	1800	30	1.8	52.5	28	5999110828244
6X10533	11.2-38 Tubeless	6	117A6	1445	284	686.1	4242.1	1285	30	1.8	42.6	28	5999110828282
6X10543	11.2-38 TT	6	117A6	1445	284	686.1	4242.1	1285	30	1.8	45.9	28	5999110828299
6X10553	11.2-38 TT	8	122A6	1445	284	686.1	4242.1	1500	30	2.4	42.7	28	5999110828305

## FARM SPECIALIST HYDRO-PRO ND

### Linear & Pivot Irrigation Systems

The Farm Specialist Hydro-Pro ND is designed with a non-directional tread pattern to maximize traction in either direction. The tire also features specially designed tread voids to facilitate cleaning. The round tread arc design also minimizes crop and soil damage, thus increasing yield.



SKU	Size	Ply rating	LI/SI	Monted Diameter [mm]	Mounted Width [mm]	Static Loaded Radius [mm]	Rolling Circumference [mm]	Max Load (kg)	Rated speed (km/h)	Inflation Pressure [bar]	Weight (kg)	Tread Depth [mm]	EAN
6X10603	11.2-24 Tubeless	6	110A6	1090	284	515.1	3199.9	1060	30	1.8	32.5	26	5999110828350
6X10593	11.2-24 TT	6	110A6	1090	284	515.1	3199.9	1060	30	1.8	30.3	26	5999110828343
6X10613	11.2-24 TT	8	116A6	1090	284	515.1	3199.9	1250	30	2.4	30.3	26	5999110828367
6X10573	14.9-24 Tubeless	6	123A6	1245	381	584.2	3657.6	1550	30	1.4	47.5	28	5999110828329
6X10563	14.9-24 TT	6	123A6	1245	381	584.2	3657.6	1550	30	1.4	43.7	28	5999110828312
6X10583	14.9-24 TT	8	128A6	1245	381	584.2	3657.6	1800	30	1.8	46.5	28	5999110828336
6X10633	11.2-38 Tubeless	6	117A6	1445	284	686.1	4242.1	1285	30	1.8	46.2	26	5999110828381
6X10623	11.2-38 TT	6	117A6	1445	284	686.1	4242.1	1285	30	1.8	43	26	5999110828374
6X10643	11.2-38 TT	8	122A6	1445	284	686.1	4242.1	1500	30	2.4	43	26	5999110828398

More from the Carlisle brand

**POWERSPORT**



**OUTDOOR POWER EQUIPMENT**



**CONSTRUCTION / INDUSTRIAL**



**TRAILERS AND TOWABLES**





**THE CARLSTAR GROUP**



**CARLISLE**<sup>®</sup>

The Carlstar Group Kft.  
Irinyi József utca 4-20. 1117 Budapest, Hungary  
[eucs@carlstargroup.eu](mailto:eucs@carlstargroup.eu)  
[www.carlstargroup.eu](http://www.carlstargroup.eu)



**THE CARLSTAR GROUP**

---

The content and information in the Catalogue is provided as information to the interested persons and may be used for informational purposes only. Information on products may pertain to limited geographic areas and markets. A reference to a product in the Catalogue does not imply that such product is, remains or will be available in the reader's location. None of the content and information in the Catalogue may be deemed to constitute an offer by The Carlstar Group. The Carlstar Group makes every effort to maintain the accuracy and quality of the information provided in the Catalogue. However, The Carlstar Group cannot guarantee and assumes no legal liability or responsibility for the accuracy or completeness of the information provided in the Catalogue. The Carlstar Group assumes no legal liability or responsibility for printing errors. It is the reader who assumes the risk that the information in the Catalogue may be incomplete, inaccurate, out of date or it may not meet the reader's needs and requirements.

---

[www.carlstargroup.eu](http://www.carlstargroup.eu) • [eucs@carlstargroup.eu](mailto:eucs@carlstargroup.eu)